


# Varistar CP | LHX 20 AC-Mains Switch-Over

## Data Solutions

### KATALOGNUMMER

23207-115

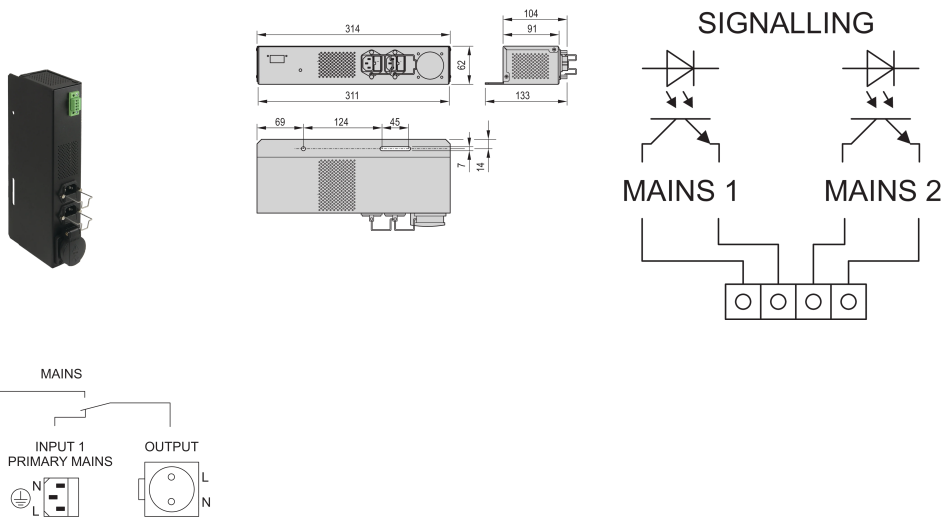

Automatic transfer switch with two inputs and one output for equipment with one power connection.

### CERTIFICERINGER



### FUNKTIONER

Designed to mount in the cabinet, fixing on upright

Signaling: Mains 1/Mains 2 existent

Suitable for LHX 20 air/water heat exchanger

Input 2 x 100 ... 240 VAC

If one mains supply fails a switchover occurs to the other supply within 20 ms; consumers (e.g. air conditioners) are effectively supplied without interruption

AC mains changeover switch for secure (redundant) supply with 2 supply voltages

Automatic switching between two AC mains supplies (normal mains, emergency mains)

## PRODUKTEGENSKABER

---

Product Type: Power Redundancy Module

Dybde: 120mm

Højde: 333mm

Bredde: 62mm

Net Weight: 1.7kg

Pakke mængde: 1

## YDERLIGERE PRODUKTOPLYSNINGER

---

Please order country specific mains cable separately.

## ADVARSEL

---

nVent-produkter skal kun installeres og anvendes som angivet i nVents produktvejledninger og træningsmaterialer. Vejledninger er tilgængelige på [www.nvent.com](http://www.nvent.com) og hos din nVent kundeservicerepræsentant. Forkert installation, misbrug, fejlanvendelse eller anden undladelse af fuldt ud at følge nVents instruktioner og advarsler kan medføre funktionsfejl, materielle skader, alvorlige personskader eller død og/eller ugyldiggøre din garanti.



Vores kraftfulde portefølje af mærker:

**CADDY ERICO HOFFMAN ILSCO SCHROFF TRACHTE**