


# Varistar CP | LHX 20 AC-Mains Switch-Over

## Data Solutions

### CATALOG NUMBER

**23207-115**

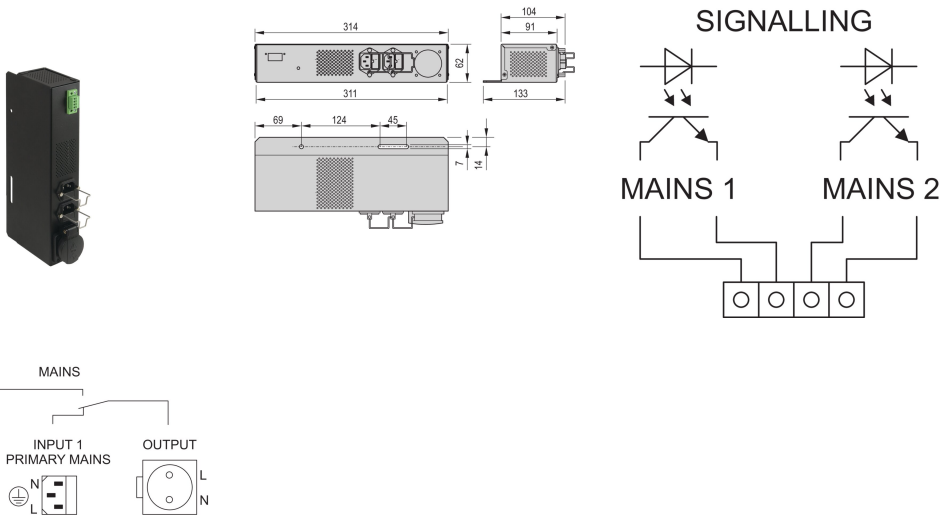

Automatic transfer switch with two inputs and one output for equipment with one power connection.

### CERTIFICATIONS



### FEATURES

Designed to mount in the cabinet, fixing on upright

Signaling: Mains 1/Mains 2 existent

Suitable for LHX 20 air/water heat exchanger

Input 2 x 100 ... 240 VAC

If one mains supply fails a switchover occurs to the other supply within 20 ms; consumers (e.g. air conditioners) are effectively supplied without interruption

AC mains changeover switch for secure (redundant) supply with 2 supply voltages

Automatic switching between two AC mains supplies (normal mains, emergency mains)

## PRODUCT ATTRIBUTES

---

Product Type: Power Redundancy Module

Depth: 120mm

Height: 333mm

Width: 62mm

Net Weight: 1.7kg

Package Quantity: 1

## ADDITIONAL PRODUCT DETAILS

---

Please order country specific mains cable separately.

## WARNING

---

nVent products shall be installed and used only as indicated in nVent's product instruction sheets and training materials. Instruction sheets are available at [www.nvent.com](http://www.nvent.com) and from your nVent customer service representative. Improper installation, misuse, misapplication or other failure to completely follow nVent's instructions and warnings may cause product malfunction, property damage, serious bodily injury and death and/or void your warranty.



Our powerful portfolio of brands:

**CADDY ERICO HOFFMAN ILSCO SCHROFF TRACHTE**