

# DT , 240 kA, 277/480 V, 3Ph

# Y 4W+G

## Data Solutions


???

### DTX240B480Y



nVent ERICO DTX240 (SPD)  
 IEC I II UL 1 2  
 B DTX240  
 240 kA C  
 (MCC) (HVAC) nVent ERICO DTX240  
 NEMA®-4X

??

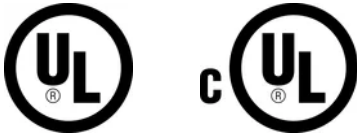

??

- ?? (UL)
- SPD
- RS-485
- 10

????

- Un: 277/480 V
- 3 ? 4W+G
- Uc: 350/700 VAC
- In)UL: 20kA 8/20 ?s
- I<sub>max</sub>): 240kA 8/20 ?s
- I<sub>imp</sub>): 12.5kA 10/350 ?s

??: 50 – 60Hz

??????? (VPR)?L-G: 1200V

??????? (VPR)?L-L: 1800V

??????? (VPR)?L-N: 1200V

??????? (VPR)?N-G: 1200V

????: L-N; L-PE; N-PE

????? (SCCR): 200kA

????? (In)?IEC: 40kA 8/20 ?s

????? (Up)?IEC: 1200 V @ 20 kA; 3000 V @ 100 kA

????? (Isc): 50kA

?: 240 to 80°C

????: ??? PC ?

?????: NEMA®-4X; UL® 50E 4 ?

????: 2.5 – 16mm<sup>2</sup>

?: 8 ?????

?????????: 2.0 A @ 240 V

????: ?C ??

????: ??????????; ??? LED; ???; OLED ???; ??/TOV ???????

?: ????????????

?????: CSA C22.2 ? 269.2 ?; UL® 1449 ? 5 ? 1/2 ??20 kA ??

?: ANSI®/IEEE® C62.41.2-2002 A ??B ?C ?; ANSI®/IEEE® C62.41.1-2002 A ??B ?C ?; ANSI®/IEEE® C62.45-2002 A ??B ?C ?; EN 61643-11 2 ?; IEC® 61643-11 II ?

?? (D): 98.3mm

?? (H): 330.7mm

?? (W): 222.5mm


????: 5.45kg

????: DT2350M

??????

????????????DTX240FP ? DTX240SM

?



??

???? nVent ????????????????? nVent ??????? www.nvent.com ????????????? nVent ????????????????????????????????????? nVent  
??



?????????:

CADDY ERICO HOFFMAN ILSCO SCHROFF TRACHTE