

SBLL-250

Data Solutions

???

SBLL-250



??



??

???????????????

?????????? nVent ERIFLEX Flexibar ????????

???????????????????????

???????

???????????????????????

?????? DIN ????????????????

?????????? SBLEC ???????????

????????????????????????????????(RoHS) ??

???

?????

???: 561132

??: ?; ???

??: ??

????????IEC: 290A

???????UL/CSA: 255A

?????? (ICW) 1 ? : 14.4kA

?????? (Ipk): 42kA

?????? (SCCR): 100kA

???????IEC (Ui): 1000; 1500

???????UL (Vin): 1000

?????: 2

?????????: 20 – 24 mm

?????????????: 10 – 120 mm²

?????????: #8 - 250 kcmil

?? (D): 65mm

?? (H): 205.7mm

?? (W): 52.3mm

A: 108mm

?????: 0.16kg

???????: UL® 1059

??????? : UL® 94V-1


??: IEC® 60947-7-1

??????

????????????????????????????

????????????????										
????*?? (°C) ????? 85°C ?????										
???? (°C)	30°	35°	40°	45°	50°	55°	60°	65°	70°	75°
???? (d)	1	1	1	0.94	0.88	0.82	0.75	0.67	0.58	0.47
*????????????										

?

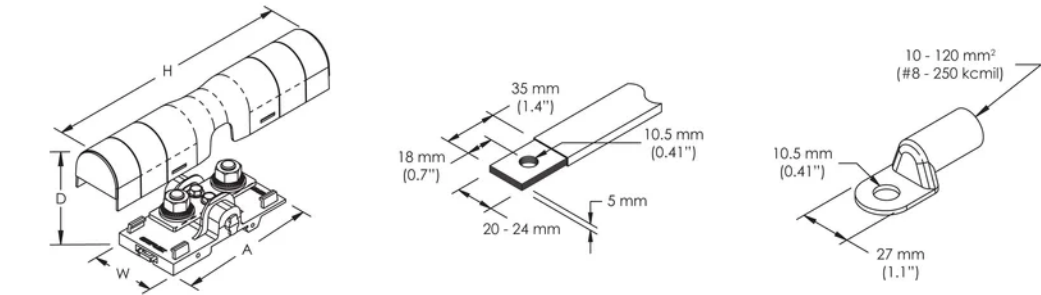

??

???? nVent ?????????????????? nVent ??????? www.nvent.com ?????????? nVent ?????????????????????????????? nVent
??



?????????:

CADDY ERICO HOFFMAN ILSCO SCHROFF TRACHTE