

□□□□□ , 250 A IEC, 255 A UL/CSA,
 □□ Line, 11 □□□ Load, □ ,
 □□□□□

Data Solutions

???

UD-250A



??



??

????????????????????????????

????????????

????????????????

????????????????

????? DIN ?????????????

??? 95%

????????????????????????????(RoHS) ??

?? EN 45545???? R23 ?? HL3 ??? R22 ?? HL2 ?

???

??????????

???: 569040

???????IEC: 250A

???????UL/CSA: 255A

?????: ??

?????: 11 ???

?: ?; ???

????????IEC: 120 mm²

????????IEC: 35 mm²

???????IEC (Ui): 1000

???????UL (Vin): 600

?????? (ICW) 1 ? : 24.5kA

?????? (I_{pk}): 51kA

???????? (ICC): 24.3kA

?????? (SCCR): 100kA

??????: 1

?????????: 35 - 120 mm²

??????: 6 – 250

??????: 11

?????????: (2) 6 - 35 mm²; (4) 2,5 - 10 mm²; (5) 2,5 - 16 mm²

???????? - ??: (2) 6 - 25 mm²; (4) 2,5 - 10 mm²; (5) 2,5 - 16 mm²

??????: (2) #10 - #1; (4) #14 - #6; (5) #14 - #4

??????: IP 20

?? (D): 50mm

?? (H): 96mm

?? (W): 49mm

????: 0.42kg

?????: UL® 1059

?????: UL® 94V-0

?: IEC® 60947-7-1

160A IEC


UL ?????????1000V AC/DC??????????????

11/11/2019

***** (°C) ***** 85°C *****

???? (°C)	30°	35°	40°	45°	50°	55°	60°	65°	70°	75°
???? (d)	1	1	1	0.94	0.88	0.82	0.75	0.67	0.58	0.47

*??????????

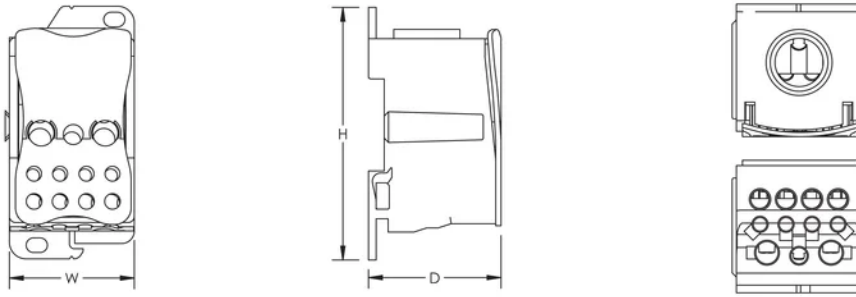

???? nVent ?????????????????? nVent ??????? www.nvent.com ???????????? nVent ??? nVent
??/??????????????



?????????:
CADDY ERICO HOFFMAN ILSCO SCHROFF TRACHTE