


MI PDU, 1U, 60A(48A)NA/48A Int, 380-415V, 3P Wye, 9 CB, (9)4-in-1

Data Solutions

???

EN1966

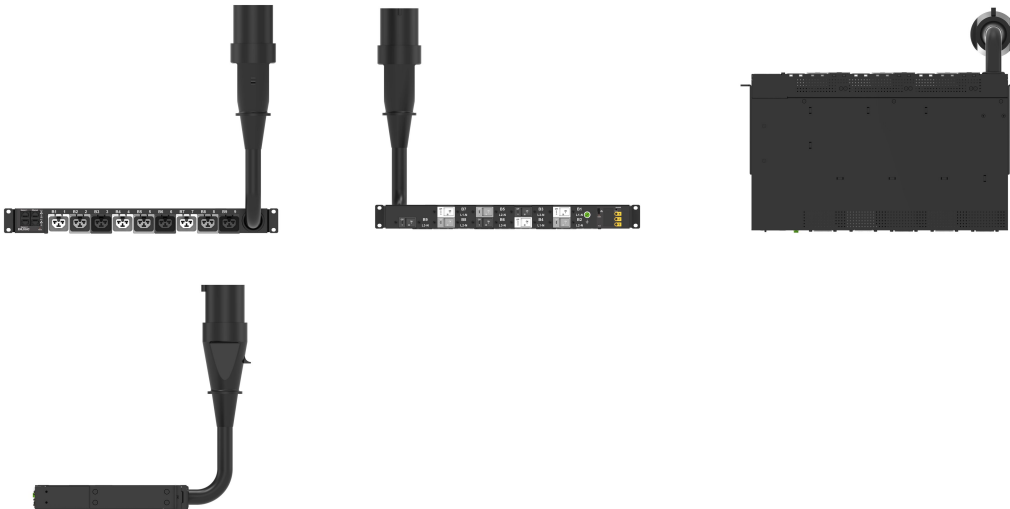

The Advantage Series Input Metered PDU family offers energy metering with advanced power and environmental monitoring options. Comprehensive monitoring at both the input phase and circuit breaker levels offers advanced alerts of potential overloads. Billing-grade metering provides accurate power consumption data for energy use optimization. The hot-swappable network management controller features Gigabit and redundant ethernet communication with advanced support for external environmental sensors and rack security access solutions.

????

????: Enlogic

????: ??

????: (9) C13/C15/C19/C21

?: ??

????: ?

???: 20 ?

?: 44mm

????: 34.6 kVA ??; 33.1 kVA ??

?????: 9

????: 380 – 415V

?: 3 PH

??: 1

????: 208 – 230VAC

????: 415V

????: IEC 60309 560P6 (IP44)

?????: ?

?????: 60 A (48 A) ??; 48 A ??

?: ????

????: 1U

?: ?

?: ?? PDU

?: 44mm

?: 444mm

?: 269mm

?: 7kg

????: 1

?????: 1.8m

??????

43 mm L x 444 mm W x 269 mm D, (269 mm D at CB)

??

???? nVent ?????????????????? nVent ??????? www.nvent.com ?????????????? nVent ?????????????????????????????????????? nVent
????????????????????????????????????????????????????????????????????????????????????????????????????????????????????????????????????



?????????:

CADDY ERICO HOFFMAN ILSCO SCHROFF TRACHTE