


MSPO PDU, 2U, 60A(48A)NA/63A Int, 208V NA, 230V Int, 1P, 4 CB, (6)C13, (6)4-in-1

Data Solutions

???

EN6354

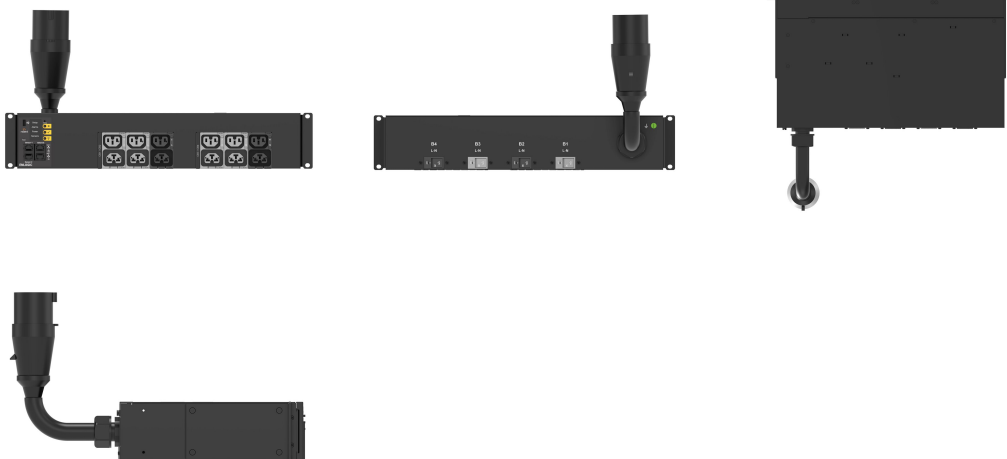

The Advantage Series Outlet Metered, Outlet Switched PDU family offers energy metering with advanced power and environmental monitoring options and remote outlet on/off switching. Comprehensive monitoring at the input phase, circuit breaker, and individual outlet levels offers advanced alerts of potential overloads. Billing-grade metering provides accurate power consumption data for energy use optimization. The hot-swappable network management controller features Gigabit and redundant ethernet communication with advanced support for external environmental sensors and rack security access solutions.

????

????: Enlogic

????: ??

????: (6) C13/C15; (6) C13/C15/C19/C21

???: 20 ?

?: ??

?????: 4

????: ?

?: 87mm

????: 11.5 kVA ??; 14.5 kVA ??

?????: 5kAIC

?: 1

????: 208V

?: 1 ?

????: 208 – 230VAC

????: IEC 60309 360P6 (IP44)

????: 230V

???????: ?

???????: 60 A (48 A) ??; 63 A ??

????: 2U

?: ?? PDU

?: ????

????: ??

?: ?

?: 87mm

?: 8kg

?: 444mm

?: 269mm

????: 1

?????: 3m

???????

87 mm L x 444 mm W x 269 mm D, (269 mm D at CB)

??

???? nVent ?????????????????? nVent ??????? www.nvent.com ?????????????? nVent ?????????????????????????????????????? nVent
??



???????????:

CADDY ERICO HOFFMAN ILSCO SCHROFF TRACHTE