

nVent CADDY Speed Link Catenary Cable Spool



FUNKTIONER

Used for installing custom lengths of catenary cable with two locking devices

Spool with nVent CADDY Speed Link steel wire

Wire rope constructed from 7 bundles of 19 strands each of steel aircraft wire

SPECIFIKATIONER

Finish: Hot-Dip Galvanized

Materiale: Stål

Table 1/1

Katalognummer	Artikelnummer	Wire Rope Diameter	Wire Rope Length	Angle (a)
SLC6CTO	196819	6 mm		60 ° Max
SLC6L50	196821	6 mm	50m	60 ° Max

YDERLIGERE PRODUKTOPLYSNINGER


Static load 1 represents a point load in the center of the catenary installation. Static load 2 represents a two or three point distributed load on the catenary installation. Static load 3 represents a four or more point distributed load on the catenary installation.

Preload of the wire rope must be applied using Catenary Tensioning Tool.

Cut-to-order (CTO) lengths orderable in meter increments.

Horizontal Installation		
Preload	1000 N	450 N
Static Load 1 (F1)	490 N	590 N
Static Load 2 (F2)	880 N	1080 N
Static Load 3 (F3)	980 N	1180 N
Vertical Installation		
Static Load 4 (F4)	4440 N	

DIAGRAMS

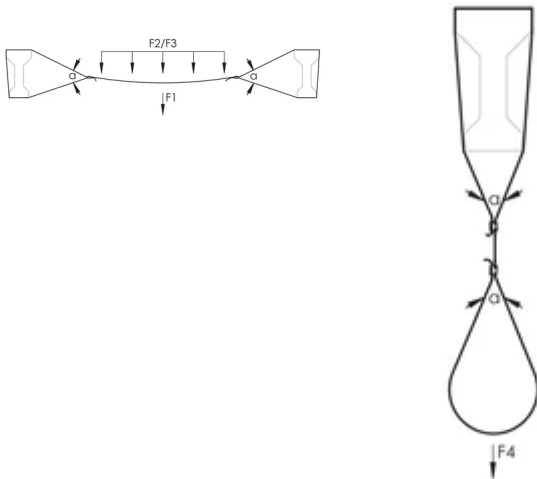

ADVARSEL

nVent-produkter skal kun installeres og anvendes som angivet i nVents produktvejledninger og træningsmaterialer. Vejledninger er tilgængelige på www.nvent.com og hos din nVent kundeservicerepræsentant. Forkert installation, misbrug, fejlanvendelse eller anden unkladelse af fuldt ud at følge nVents instruktioner og advarsler kan medføre funktionsfejl, materielle skader, alvorlige personskader eller død og/eller ugyldiggøre din garanti.

North America

+1.800.753.9221
 Option 1 – Customer Care
 Option 2 – Technical
 Support

Europe

Netherlands:
 +31 800-0200135
 France:
 +33 800 901 793

Europe

Germany:
 800 1890272
 Other Countries:
 +31 13 5835404

APAC

Shanghai:
 + 86 21 2412 1618/19
 Sydney:
 +61 2 9751 8500



Vores kraftfulde portefølje af mærker:

CADDY ERICO HOFFMAN ILSCO SCHROFF TRACHTE

