

# Snap Close Conduit/Pipe Clamp



The nVent CADDY Snap Close Conduit Clamps (M-Series) are a fast and efficient method to secure conduit branch circuits for electrical installations. The M-Series is designed to provide positional consistency in application by eliminating conduit offset as well as maintain spacing entering electrical boxes. Increase installation efficiency by utilizing our comprehensive conduit range for your next electrical project.

## CERTIFICERINGER



## FUNKTIONER

May be used for either vertical or horizontal installations

Eliminates need for offset bending conduit

Finger closure, no tools required

Locking design has greater resistance to twisting loads and is stronger than any on the market

Low profile locking tabs and smooth gripping dimples remove the possibility of scrapes

812M and 16M feature double tabs to center conduit, increase range and holding power and prevent conduit from sliding

## SPECIFIKATIONER

Table 1/2


Katalognummer	Artikelnummer	Materiale	Finish	Outer Diameter (OD)	Hole Size (HS)	Hole Type
24M	170120	Spring Steel	nVent CADDY Armour	42 - 50 mm	7 mm	Plain
16M	170100	Spring Steel	nVent CADDY Armour	23.4 - 35 mm	7 mm	Plain
20M	170110	Spring Steel	nVent CADDY Armour	35 - 42 mm	7 mm	Plain

Katalognummer	Artikelnummer	Materiale	Finish	Outer Diameter (OD)	Hole Size (HS)	Hole Type
8MS1	179900	Stainless Steel 301 (EN 1.4310)		18 - 22 mm	7 mm	Plain
812M	177130	Spring Steel	nVent CADDY Armour	18 - 30 mm	7 mm	Plain
12MS1	179910	Stainless Steel 301 (EN 1.4310)		22 - 30 mm	7 mm	Plain
32M	170130	Spring Steel	nVent CADDY Armour	50 - 60 mm	7 mm	Plain
6M	170790	Spring Steel	nVent CADDY Armour	14 - 18 mm	7 mm	Plain

Table 2/2

Katalognummer	Artikelnummer	Static Load 1 (F1)	Static Load 2 (F2)	Certificeringer
24M	170120	440N	110N	cUL, UL
16M	170100	440N	110N	cUL, UL
20M	170110	440N	110N	cUL, UL
8MS1	179900	440N	110N	
812M	177130	440N	110N	cUL, UL
12MS1	179910	440N	110N	
32M	170130	440N	110N	UL, cUL
6M	170790	440N	110N	UL, cUL

## DIAGRAMS

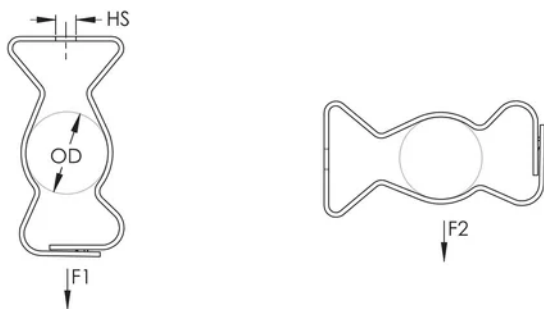

## ADVARSEL

nVent-produkter skal kun installeres og anvendes som angivet i nVents produktvejledninger og træningsmaterialer. Vejledninger er tilgængelige på [www.nvent.com](http://www.nvent.com) og hos din nVent kundeservicerepræsentant. Forkert installation, misbrug, fejlanvendelse eller anden undladelse af fuldt ud at følge nVents instruktioner og advarsler kan medføre funktionsfejl, materielle skader, alvorlige personskader eller død og/eller ugyldiggøre din garanti.

**North America**

+1.800.753.9221

Option 1 – Customer Care

Option 2 – Technical

Support

**Europe**

Netherlands:

+31 800-0200135

France:

+33 800 901 793

**Europe**

Germany:

800 1890272

Other Countries:

+31 13 5835404

**APAC**

Shanghai:

+ 86 21 2412 1618/19

Sydney:

+61 2 9751 8500



Vores kraftfulde portefølje af mærker:

**CADDY ERICO HOFFMAN ILSCO SCHROFF TRACHTE**

