


# EC35 Earthing/Grounding Connector



## CERTIFICERINGER



## FUNKTIONER

Very compact clamp for connecting cable conductors to earthing busbar without drilling

Conductor is clamped with a pressure plate

Clamps can be mounted and slid into position on busbar prior to connecting conductors

Connections can be added after busbar has been mounted

Single screw locks clamp and makes connection

EAC compliant

RoHS compliant

## SPECIFIKATIONER


Table 1/2

Katalognummer	Artikelnummer	Finish	Materiale	Busbar Thickness	Busbar Width	Conductor Size
EC35	553470	Electrogalvanized	Stål	4 - 5 mm	12 mm	2.5 mm <sup>2</sup> Solid - 35 mm <sup>2</sup> Solid, 16 mm <sup>2</sup> Stranded

Table 2/2

Katalognummer	Artikelnummer	Dybde (D)	Height (H)	Width (W)	Torque (TQ)	Unit Weight
EC35	553470	14mm	27 mm	31 mm	6 N·m	0.03 kg

## DIAGRAMS

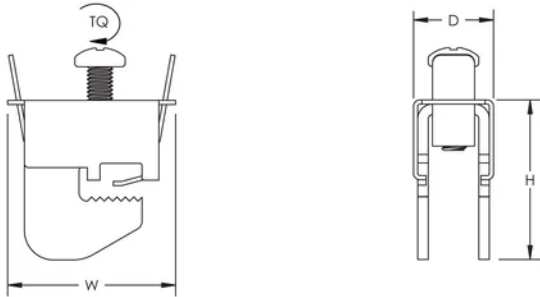

## ADVARSEL

nVent-produkter skal kun installeres og anvendes som angivet i nVents produktvejledninger og træningsmaterialer. Vejledninger er tilgængelige på [www.nvent.com](http://www.nvent.com) og hos din nVent kundeservicerepræsentant. Forkert installation, misbrug, fejlanvendelse eller anden unkladelse af fuldt ud at følge nVents instruktioner og advarsler kan medføre funktionsfejl, materielle skader, alvorlige personskader eller død og/eller ugyldiggøre din garanti.

### North America

+1.800.753.9221  
Option 1 – Customer Care  
Option 2 – Technical  
Support

### Europe

Netherlands:  
+31 800-0200135  
France:  
+33 800 901 793

### Europe

Germany:  
800 1890272  
Other Countries:  
+31 13 5835404

### APAC

Shanghai:  
+ 86 21 2412 1618/19  
Sydney:  
+61 2 9751 8500



Vores kraftfulde portefølje af mærker:

**CADDY ERICO HOFFMAN ILSCO SCHROFF TRACHTE**