


CABS Busbar Support Kit

Power Utilities



CERTIFICERINGER



FUNKTIONER

For all busbar types

Improve bending resistance by interlocking or stacking two profiles

Quick and easy to install

Halogen free insulators

RoHS compliant

SPECIFIKATIONER

Table 1/4

Katalognummer	Artikelnummer	Materiale	Finish	Typical Application Current Rating	Max Working Voltage, IEC (Ui)	Working Temperature
CABS4-5TN-400	549310	Aluminium, Glass Fibre Reinforced Polyamide, Stål	Electro galvaniz ed	400 – 4500A	1000, 1500	-40 to 130°C

Table 2/4

Katalognummer	Artikelnummer	Complies With	Flammability Rating	Busbars per Phase	Busbar Width	Busbar Thickness
CABS4-5TN-400	549310	IEC® 60439.1, IEC® 61439.1, IEC® 60695-2-11 (Glow Wire Test 960 °C)	UL® 94V-0	1 – 4	30 – 125mm	5mm


Table 3/4

Katalognummer	Artikelnummer	Dybde (D)	Width (W)	A	B	C
CABS4-5TN-400	549310	39mm	350mm	300mm	75mm	325mm

Table 4/4

Katalognummer	Artikelnummer	Unit Weight
CABS4-5TN-400	549310	0.8kg

DIAGRAMS

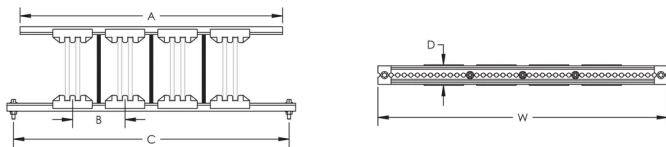

ADVARSEL

nVent-produkter skal kun installeres og anvendes som angivet i nVents produktvejledninger og træningsmaterialer. Vejledninger er tilgængelige på www.nvent.com og hos din nVent kundeservicerepræsentant. Forkert installation, misbrug, fejlanvendelse eller anden unladelse af fuldt ud at følge nVents instruktioner og advarsler kan medføre funktionsfejl, materielle skader, alvorlige personskader eller død og/eller ugyldiggøre din garanti.



Vores kraftfulde portefølje af mærker:

CADDY ERICO HOFFMAN ILSCO SCHROFF TRACHTE