

# Single Hole Cable Strap



## CERTIFICATIONS



## FEATURES

Secures lightning protection conductors and prevents displacement

Mechanically secured with screws or nails

## SPECIFICATIONS

Table 1/2

Catalog Number	Article Number	Material	Outer Diameter (OD)	Depth (D)	Width (W)	Hole Size (HS)
PC010C	711390	Copper	10 mm	15mm	42 mm	7 mm
LPC801		Copper	11.91 mm	9.84mm	25 mm	4.76 mm
PC008A	711370	Aluminum	7 mm	10mm	28 mm	5 mm
LPC805		Copper	12.7 mm	15.88mm	31.75 mm	7.14 mm
LPA805		Aluminum	12.7 mm	15.88mm	31.75 mm	7.14 mm

Table 2/2


Catalog Number	Article Number	Certifications
PC010C	711390	

Catalog Number	Article Number	Certifications
LPC801		E202878-Combined_CoC, E202878-Combined_CoC
PC008A	711370	
LPC805		E202878-Combined_CoC, E202878-Combined_CoC
LPA805		

## ADDITIONAL PRODUCT DETAILS

Typically installed every 3' (0.9 m) of conductor.

## DIAGRAMS

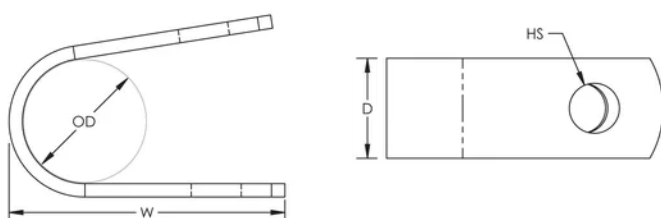

## WARNING

nVent products shall be installed and used only as indicated in nVent's product instruction sheets and training materials. Instruction sheets are available at [www.nvent.com](http://www.nvent.com) and from your nVent customer service representative. Improper installation, misuse, misapplication or other failure to completely follow nVent's instructions and warnings may cause product malfunction, property damage, serious bodily injury and death and/or void your warranty.

### North America

+1.800.753.9221  
Option 1 – Customer Care  
Option 2 – Technical  
Support

### Europe

Netherlands:  
+31 800-0200135  
France:  
+33 800 901 793

### Europe

Germany:  
800 1890272  
Other Countries:  
+31 13 5835404

### APAC

Shanghai:  
+ 86 21 2412 1618/19  
Sydney:  
+61 2 9751 8500



Our powerful portfolio of brands:

**CADDY ERICO HOFFMAN ILSCO SCHROFF TRACHTE**