

# Push In Conduit Clamp



## FEATURES

Push-in installation of conduit

Eliminates need for offset bending conduit

May be used for either vertical or horizontal installations

## SPECIFICATIONS

**Finish:** nVent CADDY Armour

**Material:** Spring Steel


Table 1/2

Catalog Number	Article Number	E-Number	Outer Diameter (OD)	Hole Size (HS)	Hole Type	Ultimate Static Load 1 (F1)
12P	171150	1319444	22 - 30 mm	7 mm	Plain	110N
16P	171170	1319445	30 - 35 mm	7 mm	Plain	110N
8P	171130		18 - 22 mm	7 mm	Plain	110N

Table 2/2

Catalog Number	Article Number	E-Number	Ultimate Static Load 2 (F2)
12P	171150	1319444	65N
16P	171170	1319445	65N
8P	171130		65N

## DIAGRAMS

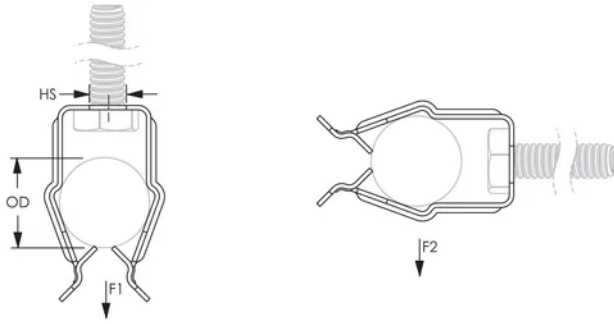

## WARNING

nVent products shall be installed and used only as indicated in nVent's product instruction sheets and training materials. Instruction sheets are available at [www.nvent.com](http://www.nvent.com) and from your nVent customer service representative. Improper installation, misuse, misapplication or other failure to completely follow nVent's instructions and warnings may cause product malfunction, property damage, serious bodily injury and death and/or void your warranty.

### North America

+1.800.753.9221  
Option 1 – Customer Care  
Option 2 – Technical  
Support

### Europe

Netherlands:  
+31 800-0200135  
France:  
+33 800 901 793

### Europe

Germany:  
800 1890272  
Other Countries:  
+31 13 5835404

### APAC

Shanghai:  
+ 86 21 2412 1618/19  
Sydney:  
+61 2 9751 8500



Our powerful portfolio of brands:

**CADDY ERICO HOFFMAN ILSCO SCHROFF TRACHTE**

