


Swing Frame for 600 mm Width

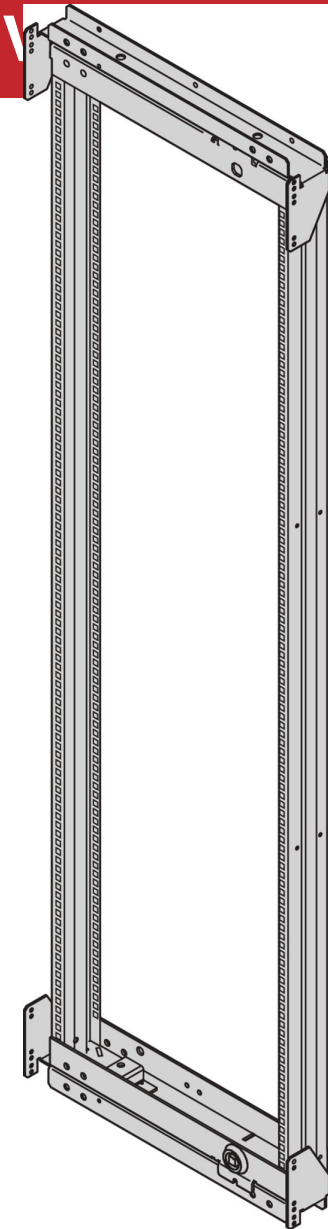

The 19" swing frame allows the installation of sub-racks while simultaneously making wiring at the rear accessible.

Varistar CP swing frame comes with 150 KG load capacity, 120° movement and flexible pivot point.

FEATURES

For full height or partial-height mounting

Pivot point can be selected right or left

Can accommodate 19" chassis and 19" subracks (maximum depth 200 mm)

120° hinge, square locks including 2 keys

Load-carrying capacity 150 kg

SPECIFICATIONS

| | |
|----------------------|--------------------|
| Width: | 600mm |
| Product Type: | Cabinet/Rack Frame |
| Material: | Steel |

Table 1/2

| Catalog Number | Rack Height | Package Quantity | Color | Color Code | Finish | Height |
|----------------|-------------|------------------|------------|------------|---------------|--------|
| 21630-668 | 24U | 1 | Black Grey | RAL 7021 | Powder Coated | 1200mm |
| 21630-678 | 47U | 1 | Black Grey | RAL 7021 | Powder Coated | 2200mm |
| 21630-676 | 42U | 1 | Black Grey | RAL 7021 | Powder Coated | 2000mm |
| 21630-674 | 38U | 1 | Black Grey | RAL 7021 | Powder Coated | 1800mm |
| 21630-672 | 33U | 1 | Black Grey | RAL 7021 | Powder Coated | 1600mm |
| 21630-670 | 29U | 1 | Black Grey | RAL 7021 | Powder Coated | 1400mm |

Table 2/2

| Catalog Number | Protection Rating |
|----------------|-------------------|
| 21630-668 | IP20 |
| 21630-678 | IP20 |
| 21630-676 | IP20 |
| 21630-674 | IP20 |
| 21630-672 | IP20 |
| 21630-670 | IP20 |

ADDITIONAL PRODUCT DETAILS

By aid of depth members 19" swing frames can be assembled directly on the cabinet frame or in depth-adjustable increments of 50 mm.

Please purchase the grounding kit separately.

WARNING

nVent products shall be installed and used only as indicated in nVent's product instruction sheets and training materials. Instruction sheets are available at www.nvent.com and from your nVent customer service representative. Improper installation, misuse, misapplication or other failure to completely follow nVent's instructions and warnings may cause product malfunction, property damage, serious bodily injury and death and/or void your warranty.

North America

All locations

+1.763.422.2661

Chat with us:

nvent.com/schroff

Europe

Straubenhardt, Germany

+49.7082.794.0

Betschdorf, France

+33.3.88.90.64.90

Warsaw, Poland

+48.22.209.98.35

Assago, Italy

+39.02.932.7141

Chat with us:

nvent.com/schroff

Asia

Shanghai, China

+86.21.2412.6943

Qingdao, China

+86.532.8771.6101

Singapore

+65.6768.5800

Shin-Yokohama, Japan

+81.45.476.0271

Chat with us:

nvent.com/schroff

Middle East & India

Dubai, United Arab Emirates

+971.4.378.1700

Bangalore, India

+91.80.6715.2001

Istanbul, Turkey

+90.216.250.7374

Chat with us:

nvent.com/schroff



Our powerful portfolio of brands:

CADDY

ERICO

HOFFMAN

ILSCO

SCHROFF

TRACHTE