


Front Panel, Flat, Refrofit Shielding, D-Sub Cutouts



Flat front panel with cutout for D-Sub connectors.
Shieldable for stainless steel EMC gasket.

CERTIFICATIONS

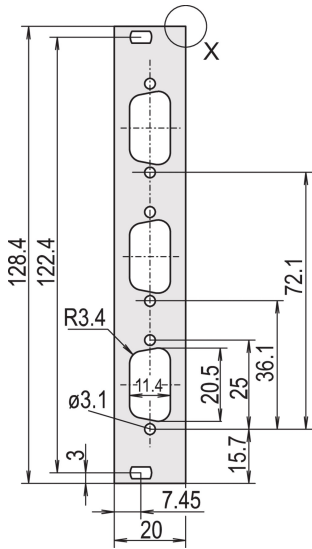

FEATURES

For stainless steel EMC gasket

Al, 2.5 mm, front anodized, conductive

SPECIFICATIONS

| | |
|------------------------|----------------------|
| Rack Height: | 3U |
| Rack Width: | 4HP |
| Material: | Aluminum |
| Finish: | Anodized; Passivated |
| Accessory Type: | Front panel |
| Product Type: | Front Panel |

Type: Front Panel without Handle

EMC Shielding: No (Retrofittable)

Table 1/2

| Catalog Number | Package Quantity | Mounting | Gasket Type | Front Finish | Rear Finish | Number of Pins |
|----------------|------------------|----------------|------------------------|--------------|-------------|----------------|
| 30118-351 | 1 | Screw-on Front | Stainless Steel EMC | Anodized | Conductive | (2) 9 |
| 30118-352 | 1 | Screw-on Front | Stainless Steel EMC | Anodized | Conductive | (2) 15 |
| 30118-349 | 1 | Screw-on Front | Stainless Steel EMC | Anodized | Conductive | (1) 15 |
| 30118-353 | 1 | Screw-on Front | Stainless Steel EMC | Anodized | Conductive | (2) 25 |
| 30118-354 | 1 | Screw-on Front | Stainless Steel EMC | Anodized | Conductive | (3) 9 |
| 30118-350 | 1 | Screw-on Front | Stainless Steel EMC | Anodized | Conductive | (1) 25 |
| 30118-348 | 1 | Screw-on Front | Stainless Steel EMC | Anodized | Conductive | (1) 9 |

Table 2/2

| Catalog Number | Treated Edges | Complies With | Depth (D) | Height (H) | Width (W) |
|----------------|---------------|------------------------------------|-----------|------------|-----------|
| 30118-351 | No | IEC 60297-3-101, IEEE 1101.1/10 | 2.5mm | 128.4mm | 19.98mm |
| 30118-352 | No | IEC 60297-3-101, IEEE 1101.1/10 | 2.5mm | 128.4mm | 19.98mm |
| 30118-349 | No | IEC 60297-3-101, IEEE 1101.1/10 | 2.5mm | 128.4mm | 19.98mm |
| 30118-353 | No | IEC 60297-3-101, IEEE 1101.1/10 | 2.5mm | 128.4mm | 19.98mm |
| 30118-354 | No | IEC 60297-3-101, IEEE 1101.1/10 | 2.5mm | 128.4mm | 19.98mm |
| 30118-350 | No | IEC 60297-3-101, IEEE 1101.1/10 | 2.5mm | 128.4mm | 19.98mm |
| 30118-348 | No | IEC 60297-3-101, IEEE 1101.1/10 | 2.5mm | 128.4mm | 19.98mm |

ADDITIONAL PRODUCT DETAILS








Please order fixing material (sleeves, collar screws) separately.

Delivery is in standard pack multiples. Pricing is per individual item.

Please order stainless steel EMC gasket separately.

Please take into consideration that deliveries may be carried out in the stated SPQs (SPQ, e.g. 5 pieces, 10 pieces, 50 pieces, etc.). Differing order quantities (e.g. 2 pieces) may be changed to the next possible delivery quantity = Standard Pack Quantity.

DIAGRAMS

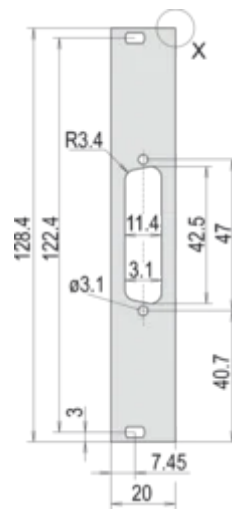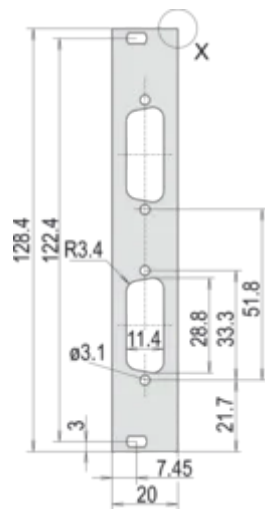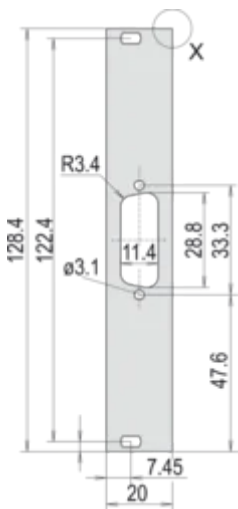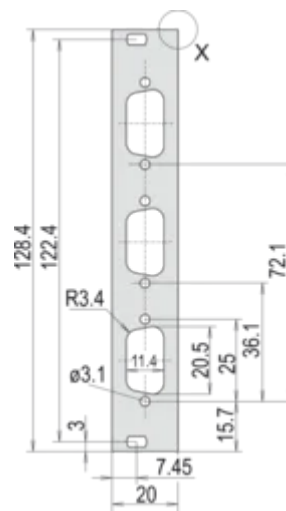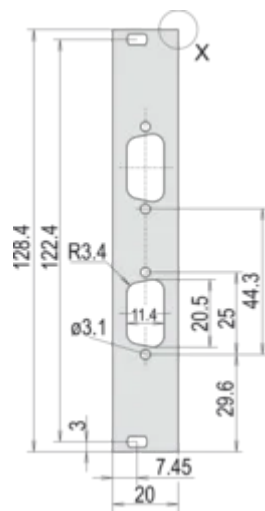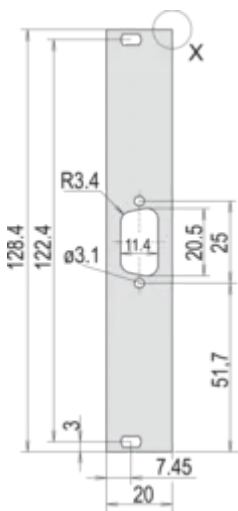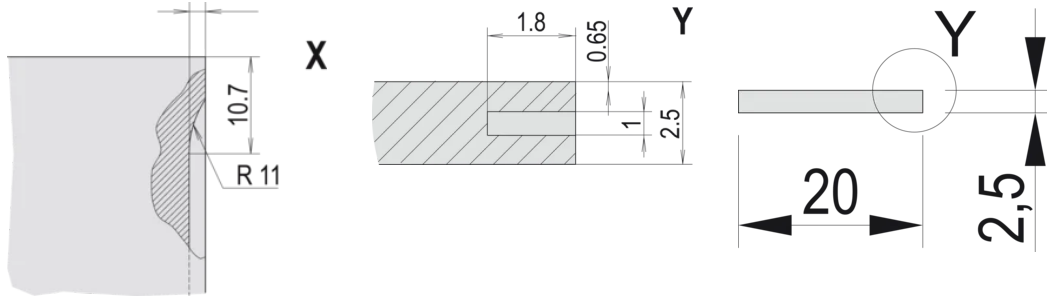



WARNING

nVent products shall be installed and used only as indicated in nVent's product instruction sheets and training materials. Instruction sheets are available at www.nvent.com and from your nVent customer service representative. Improper installation, misuse, misapplication or other failure to completely follow nVent's instructions and warnings may cause product malfunction, property damage, serious bodily injury and death and/or void your warranty.

North America

All locations
 +1.763.422.2661
 Chat with us:
nvent.com/schroff

Europe

Straubenhardt, Germany
 +49.7082.794.0
 Betschdorf, France
 +33.3.88.90.64.90
 Warsaw, Poland
 +48.22.209.98.35
 Assago, Italy
 +39.02.932.7141
 Chat with us:
nvent.com/schroff

Asia

Shanghai, China
 +86.21.2412.6943
 Qingdao, China
 +86.532.8771.6101
 Singapore
 +65.6768.5800
 Shin-Yokohama, Japan
 +81.45.476.0271
 Chat with us:
nvent.com/schroff

Middle East & India

Dubai, United Arab Emirates
 +971.4.378.1700
 Bangalore, India
 +91.80.6715.2001
 Istanbul, Turkey
 +90.216.250.7374
 Chat with us:
nvent.com/schroff



Our powerful portfolio of brands:

CADDY ERICO HOFFMAN ILSCO SCHROFF TRACHTE