

# Push In Conduit Clamp



## CERTIFICATIONS



## FEATURES

Push-in installation of conduit

Eliminates need for offset bending conduit

May be used for either vertical or horizontal installations

## SPECIFICATIONS

**Finish:** nVent CADDY Armour


**Material:** Spring Steel

Table 1/1

Catalog Number	EMT Conduit Size	Outer Diameter (OD)	Hole Size (HS)	Hole Type	Ultimate Static Load 1 (F1)	Ultimate Static Load 2 (F2)
16P4I	1"	1"	1/4"	Threaded	25lb	15lb
8P4I	1/2"	0.710" - 0.87"	1/4"	Threaded	25lb	15lb

Catalog Number	EMT Conduit Size	Outer Diameter (OD)	Hole Size (HS)	Hole Type	Ultimate Static Load 1 (F1)	Ultimate Static Load 2 (F2)
12P4I	3/4"	3/4"	1/4"	Threaded	25lb	15lb
16P	1"	1.180" - 1.38"	9/32"	Plain	25lb	15lb
12P	3/4"	0.870" - 1.18"	9/32"	Plain	25lb	15lb
8P	1/2"	0.710" - 0.87"	9/32"	Plain	25lb	15lb

## DIAGRAMS

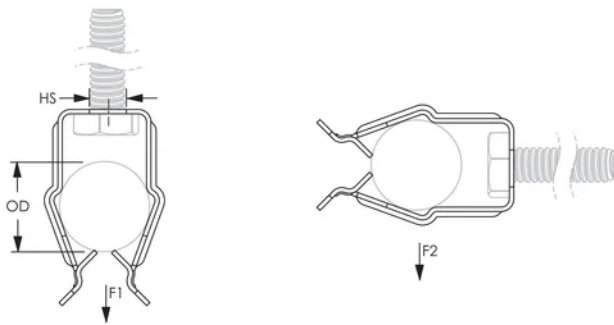

## WARNING

nVent products shall be installed and used only as indicated in nVent's product instruction sheets and training materials. Instruction sheets are available at [www.nvent.com](http://www.nvent.com) and from your nVent customer service representative. Improper installation, misuse, misapplication or other failure to completely follow nVent's instructions and warnings may cause product malfunction, property damage, serious bodily injury and death and/or void your warranty.

### North America

+1.800.753.9221  
Option 1 – Customer Care  
Option 2 – Technical Support

### Europe

Netherlands:  
+31 800-0200135  
France:  
+33 800 901 793

### Europe

Germany:  
800 1890272  
Other Countries:  
+31 13 5835404

### APAC

Shanghai:  
+ 86 21 2412 1618/19  
Sydney:  
+61 2 9751 8500



Our powerful portfolio of brands:

**CADDY ERICO HOFFMAN ILSCO SCHROFF TRACHTE**

