


**Tipo de mango de insertor/extractor IET,
palanca gris, botón negro, parte inferior, 10
piezas**


NÚMERO DE CATÁLOGO

20817-660

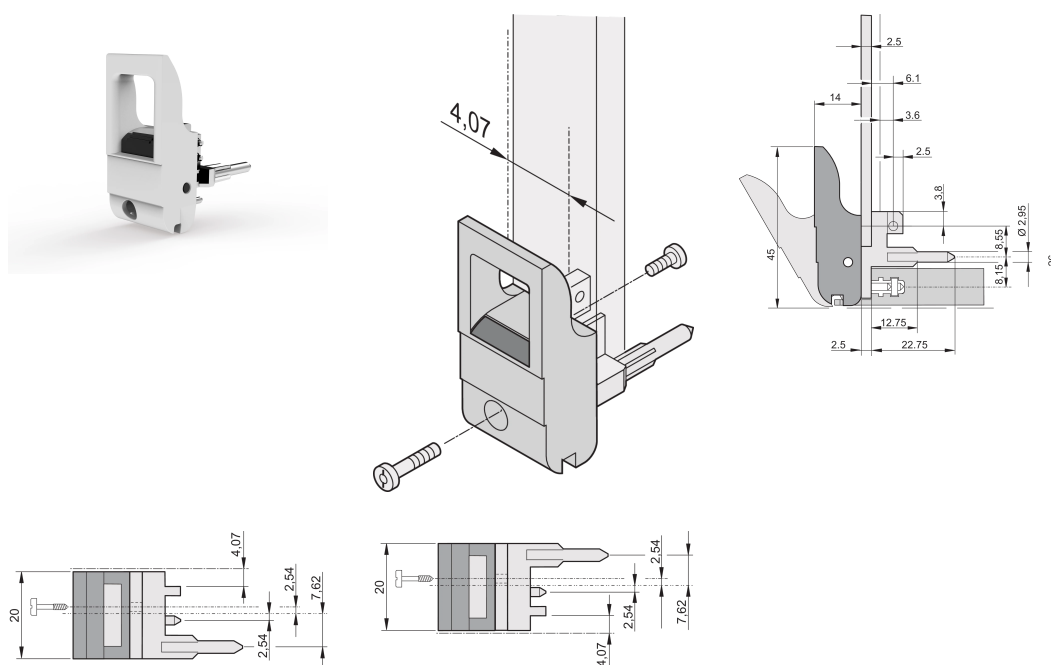

El mango del insertor/extractor, tipo IET de acuerdo con IEEE 1101.10. Dos de estos mangos pueden superar una fuerza de palanca única de 700 N (por par).

CERTIFICACIONES



CARACTERÍSTICAS

Adecuado para fuerzas de inserción y extracción de hasta 700 N (por par)

De acuerdo con IEEE 1101,10 e IEC 60297-3-102

Con bloqueo

Codificabile i.a.w. IEEE 1101,10 e IEC 60297-3-103

Cantidad del paquete: 10

Grado de inflamabilidad: UL® 94V-0

Color: Gris

De conformidad con: EN 45545-2

Material: Policarbonato

Tipo de producto: Maneja

Tipo: Insertor/extractor, estándar

Compatible con: Paneles frontales

Gross Weight: 0.235kg

Por favor, ordene las pegs de codificación y el microswitch por separado.

Technical drawing of a door handle assembly, showing exploded and assembled views with dimensions in millimeters.

Exploded View (Left):

- Shows the handle body, a mounting plate, and two screws.
- Dimension 4.07 indicates the distance from the top of the handle body to the center of the mounting plate.

Top View (Bottom Left):

- Shows the top of the handle body.
- Dimensions: 20 (width), 2.54 (height of the top section), 2.54 (height of the bottom section), 7.62 (total height), and 4.07 (distance from the top edge to the center of the mounting hole).

Bottom View (Top Right):

- Shows the bottom of the handle body.
- Dimensions: 20 (width), 2.54 (height of the top section), 2.54 (height of the bottom section), 7.62 (total height), and 4.07 (distance from the top edge to the center of the mounting hole).

Side View (Center):

- Shows the side profile of the handle body.
- Dimensions: 14 (width of the top section), 2.5 (width of the bottom section), 3.8 (height of the top section), 2.5 (height of the bottom section), 8.15 (total height), 8.95 (height of the top section), 0.255 (height of the bottom section), 12.75 (width of the top section), 22.75 (width of the bottom section), and 26 (total width).

Los productos nVent deben instalarse y usarse solo como se indica en las hojas de instrucciones y materiales de capacitación del producto nVent. Instruction sheets are available at www.nvent.com and from your nVent customer service

representative. La instalación incorrecta, el mal uso, la aplicación incorrecta u otras fallas en el seguimiento completo de las instrucciones y advertencias de nVent pueden causar el mal funcionamiento del producto, daños a la propiedad, lesiones corporales graves y la muerte y/o anular la garantía.

North America

All locations
+1.763.422.2661
Chat with us:
nvent.com/schroff

Europe

Straubenhardt, Germany
+49.7082.794.0
Betschdorf, France
+33.3.88.90.64.90
Warsaw, Poland
+48.22.209.98.35
Assago, Italy
+39.02.932.7141
Chat with us:
nvent.com/schroff

Asia

Shanghai, China
+86.21.2412.6943
Qingdao, China
+86.532.8771.6101
Singapore
+65.6768.5800
Shin-Yokohama, Japan
+81.45.476.0271
Chat with us:
nvent.com/schroff

Middle East & India

Dubai, United Arab Emirates
+971.4.378.1700
Bangalore, India
+91.80.6715.2001
Istanbul, Turkey
+90.216.250.7374
Chat with us:
nvent.com/schroff



Nuestra poderosa cartera de marcas:

CADDY ERICO HOFFMAN ILSCO SCHROFF TRACHTE