


U-profile Front Panel, Shieldable, D-Sub Cutouts



U-profile front panel with cutout for D-Sub connectors.
Shieldable for textile EMC gasket.

CERTIFICATIONS

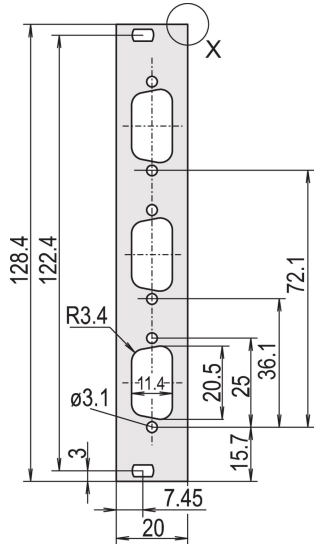

CARACTERÍSTICAS

U-profile, front panel, Al, 2.5 mm, front anodized, rear conductive

For EMC textile gasket

ESPECIFICAÇÕES

| | |
|--------------------------|----------------------------|
| Profundidade (D): | 2.5mm |
| Rack Height: | 3U |
| Rack Width: | 4HP |
| Material: | Aluminio |
| Acabamento: | Anodized; Passivated |
| Accessory Type: | Front panel |
| Product Type: | Front Panel |
| Tipo: | Front Panel without Handle |

EMC Shielding: No (Retrofittable)

Table 1/2

| Número de catálogo | Quantidade por embalagem | Instalação | Gasket Type | Front Finish | Rear Finish | Number of Pins |
|--------------------|--------------------------|----------------|-------------|--------------|-------------|----------------|
| 30849-752 | 1 | Screw-on Front | Textile EMC | Anodized | Conductive | (1) 15 |
| 30849-753 | 1 | Screw-on Front | Textile EMC | Anodized | Conductive | (2) 15 |
| 30849-750 | 1 | Screw-on Front | Textile EMC | Anodized | Conductive | (2) 9 |
| 30849-754 | 1 | Screw-on Front | Textile EMC | Anodized | Conductive | (1) 25 |
| 30849-755 | 1 | Screw-on Front | Textile EMC | Anodized | Conductive | (2) 25 |
| 30849-751 | 1 | Screw-on Front | Textile EMC | Anodized | Conductive | (3) 9 |
| 30849-749 | 1 | Screw-on Front | Textile EMC | Anodized | Conductive | (1) 9 |

Table 2/2

| Número de catálogo | Treated Edges | Em conformidade com | Altura (H) | Largura (W) |
|--------------------|---------------|---------------------------------|------------|-------------|
| 30849-752 | Não | IEC 60297-3-101, IEEE 1101.1/10 | 128.4mm | 20mm |
| 30849-753 | Não | IEC 60297-3-101, IEEE 1101.1/10 | 128.4mm | 20mm |
| 30849-750 | Não | IEC 60297-3-101, IEEE 1101.1/10 | 128.4mm | 20mm |
| 30849-754 | Não | IEC 60297-3-101, IEEE 1101.1/10 | 128.4mm | 20mm |
| 30849-755 | Não | IEC 60297-3-101, IEEE 1101.1/10 | 128.4mm | 20mm |
| 30849-751 | Não | IEC 60297-3-101, IEEE 1101.1/10 | 128.4mm | 20mm |
| 30849-749 | Não | IEC 60297-3-101, IEEE 1101.1/10 | 128.4mm | 20mm |

DETALHES ADICIONAIS DO PRODUTO








Please order fixing material (sleeves, collar screws) separately.

Delivery is in standard pack multiples. Pricing is per individual item.

Please order textile EMC gasket separately.

Please take into consideration that deliveries may be carried out in the stated SPQs (SPQ, e.g. 5 pieces, 10 pieces, 50 pieces, etc.). Differing order quantities (e.g. 2 pieces) may be changed to the next possible delivery quantity = Standard Pack Quantity.

DIAGRAMAS

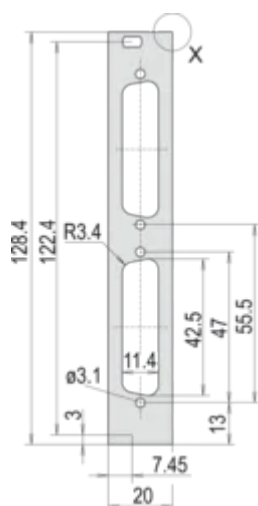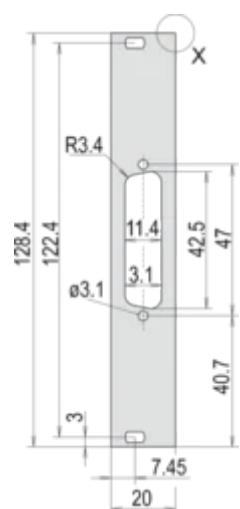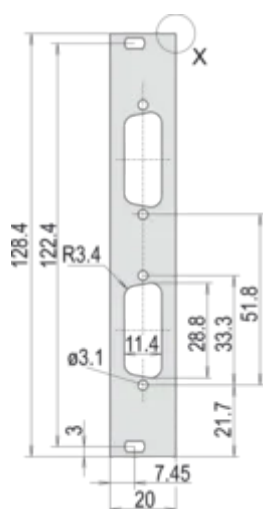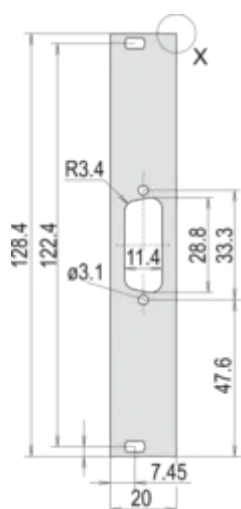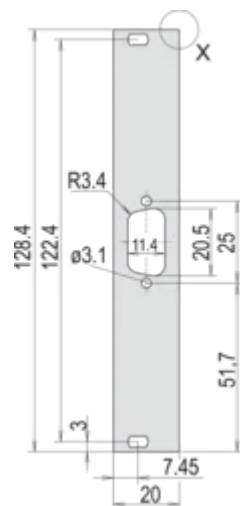

AVISO

Os produtos nVent devem ser instalados e utilizados apenas conforme indicado nas fichas de instrução do produto e materiais de treinamento da nVent. As fichas de instrução estão disponíveis em www.nVent.com e com nossos representantes de atendimento ao cliente nVent. A instalação inadequada, uso incorreto, aplicação incorreta ou outra falha qualquer em seguir completamente as instruções e avisos da nVent podem levar ao mau funcionamento do produto, danos à propriedade, lesões corporais graves e morte, e/ou anular sua garantia.

North America

All locations
+1.763.422.2661
Chat with us:
nvent.com/schroff

Europe

Straubenhardt, Germany
+49.7082.794.0
Betschdorf, France
+33.3.88.90.64.90
Warsaw, Poland
+48.22.209.98.35
Assago, Italy
+39.02.932.7141
Chat with us:
nvent.com/schroff

Asia

Shanghai, China
+86.21.2412.6943
Qingdao, China
+86.532.8771.6101
Singapore
+65.6768.5800
Shin-Yokohama, Japan
+81.45.476.0271
Chat with us:
nvent.com/schroff

Middle East & India

Dubai, United Arab
Emirates
+971.4.378.1700
Bangalore, India
+91.80.6715.2001
Istanbul, Turkey
+90.216.250.7374
Chat with us:
nvent.com/schroff



O nosso forte portefólio de marcas:

CADDY ERICO HOFFMAN ILSCO SCHROFF TRACHTE