


# Varistar CP Slide Rail

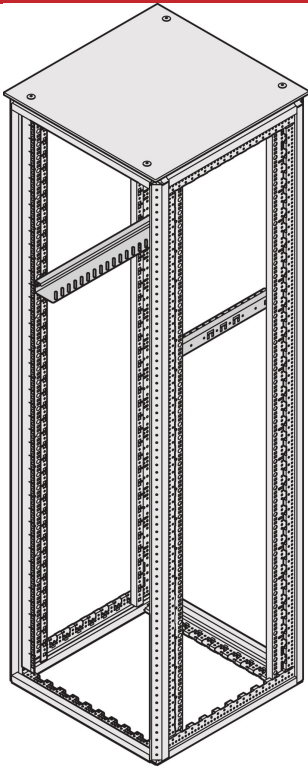

Mounts on four 19" slide mounts with 25/100 kg weight capacity.

## CERTIFICATIONS

---



## CARACTERÍSTICAS

---

Mounts on four 19" slide mounts

Wide support surface (48 mm)

Can be fitted in 1 U increments (attach and screw into place)

## ESPECIFICAÇÕES

---

**Product Type:** Slide Rail

**Material:** Aço

Table 1/2

Número de catálogo	Static Load	Quantidade por embalagem	Acabamento	Altura	Length	Works With
23130-096	25kg	2	Aluminum-Zinc Plated	500mm	456mm	Varistar CP
23130-099		2	Aluminum-Zinc Plated			Varistar CP
23130-116	100kg	2	Aluminum-Zinc Plated	200mm	156mm	Varistar CP
23130-120	100kg	2	Aluminum-Zinc Plated	740mm	699mm	Varistar CP
23130-118	100kg	2	Aluminum-Zinc Plated	500mm	458mm	Varistar CP
23130-098	25kg	2	Aluminum-Zinc Plated	740mm	699mm	Varistar CP
23130-097	25kg	2	Aluminum-Zinc Plated	700mm	656mm	Varistar CP
23130-119	100kg	2	Aluminum-Zinc Plated	700mm	658mm	Varistar CP
23130-123	100kg	10	Aluminum-Zinc Plated	500mm	458mm	Varistar CP
23130-101	25kg	10	Aluminum-Zinc Plated	500mm	456mm	Varistar CP
23130-124	100kg	10	Aluminum-Zinc Plated	700mm	658mm	Varistar CP
23130-102	25kg	10	Aluminum-Zinc Plated	700mm	656mm	Varistar CP
23130-125	100kg	10	Aluminum-Zinc Plated	740mm	699mm	Varistar CP
23130-103	25kg	10	Aluminum-Zinc Plated	740mm	699mm	Varistar CP
23130-126		10	Aluminum-Zinc Plated			Varistar CP

Table 2/2

Número de catálogo	Unidade de embalagem	Certifications
23130-096	Pair	RoHS
23130-099	Pair	
23130-116		RoHS
23130-120		RoHS
23130-118		RoHS
23130-098	Pair	RoHS

Número de catálogo	Unidade de embalagem	Certifications
23130-097	Pair	RoHS
23130-119		RoHS
23130-123		RoHS
23130-101		RoHS
23130-124		RoHS
23130-102		RoHS
23130-125		RoHS
23130-103		RoHS
23130-126		RoHS

## DETALHES ADICIONAIS DO PRODUTO

For mounting in the cabinet the 19" panel/slide mounts must be fitted front and rear.

## AVISO

Os produtos nVent devem ser instalados e utilizados apenas conforme indicado nas fichas de instrução do produto e materiais de treinamento da nVent. As fichas de instrução estão disponíveis em [www.nVent.com](http://www.nVent.com) e com nossos representantes de atendimento ao cliente nVent. A instalação inadequada, uso incorreto, aplicação incorreta ou outra falha qualquer em seguir completamente as instruções e avisos da nVent podem levar ao mau funcionamento do produto, danos à propriedade, lesões corporais graves e morte, e/ou anular sua garantia.

### North America

All locations  
+1.763.422.2661  
Chat with us:  
[nvent.com/schroff](http://nvent.com/schroff)

### Europe

Straubenhardt, Germany  
+49.7082.794.0  
Betschdorf, France  
+33.3.88.90.64.90  
Warsaw, Poland  
+48.22.209.98.35  
Assago, Italy  
+39.02.932.7141  
Chat with us:  
[nvent.com/schroff](http://nvent.com/schroff)

### Asia

Shanghai, China  
+86.21.2412.6943  
Qingdao, China  
+86.532.8771.6101  
Singapore  
+65.6768.5800  
Shin-Yokohama, Japan  
+81.45.476.0271  
Chat with us:  
[nvent.com/schroff](http://nvent.com/schroff)

### Middle East & India

Dubai, United Arab Emirates  
+971.4.378.1700  
Bangalore, India  
+91.80.6715.2001  
Istanbul, Turkey  
+90.216.250.7374  
Chat with us:  
[nvent.com/schroff](http://nvent.com/schroff)



O nosso forte portefólio de marcas:

**CADDY ERICO HOFFMAN ILSCO SCHROFF TRACHTE**