

T-Series Large Capacity Outdoor



T62
20000 BTU/Hr.
5860 Watts



T70-36
36000 BTU/Hr.
10548 Watts



T70-60
59000 BTU/Hr.
17287 Watts

INDUSTRY STANDARDS

UL/cUL Listed; Type 12, 3R, 4; 4X optional; File No. SA6453



Telcordia GR-487 capable

APPLICATION

- Industrial automation
- Telecommunications equipment
- Package handling equipment
- Security and defense systems and more

FINISH

- RAL 7035 light-gray, semi-textured powder-coat paint
- Other colors and textures available

OPTIONS

- Thermostat Malfunction Package
- Special Voltage Package
- Outdoor Package
- Harsh Environment Package*
- Stainless Steel Package*
- Heater Package

* ProAir A/C may be more appropriate. Refer to ProAir A/C Chapter. Consult the factory for availability and catalog number.

FEATURES

- Stock models equipped with head pressure control for low-ambient operation, compressor heater, coated condenser coil, malfunction switch, thermostat and heater package
- Models for 230 and 460 VAC power input
- UL Listed to save customers time and money with agency approvals (some models UL recognized)
- Outdoor model operating temperature range from $-40^{\circ}\text{F}/-40^{\circ}\text{C}$ to $131^{\circ}\text{F}/55^{\circ}\text{C}$
- Exterior and fully recessed mounting options on many models
- Compact footprint to minimize real estate and maximize capacity
- Reliable mechanical thermostat on enclosure side of the unit
- Dual condenser-side air movers for performance redundancy
- Painted galvanized sheet-metal cover for rugged factory and outdoor environments
- Easy-mount flanges for simple installation
- Cleanable, reusable aluminum mesh filter protects coils for maximum cooling performance
- Mounting hardware, gaskets and user manual furnished with the unit
- Options include:
 - Telcordia GR-487 capable
 - Thermostat
 - Corrosion-resistant components
 - Malfunction switch
 - Compressor heater
 - Head pressure control
 - Enclosure heater

PERFORMANCE DATA T62 20000 BTU/HR. (5860 WATT) MODELS

Catalog Number

Outdoor Model with Heat Pkg.	T622226G150	-	-
Outdoor Model/SST/Corrosion/4X	-	T622226G102	-
Outdoor Model without Heat Pkg	-	-	T622246G400

Cooling Performance

Nominal:			
BTU/Hr.	20500/23500	20500/23500	20500/23500
Watts	6007/6886	6007/6886	6007/6886
At 131°F/131°F (55°C/55°C):			
BTU/Hr. (50/60 Hz)	20860/23927	20860/23927	20860/23927
W (50/60 Hz)	6113/7012	6113/7012	6113/7012
At 95°F/95°F (35°C/35°C):			
BTU/Hr. (50/60 Hz)	18258/20256	18258/20256	18258/20256
W (50/60 Hz)	5351/5936	5351/5936	5351/5936
Refrigerant	R-407C		
Refrigerant Charge (ounces/grams)	42/1300	42/1300	42/1300
Operating Temperature Range:			
Maximum (°F/°C)	131/55	131/55	131/55
Minimum (°F/°C)	-40/-40	-40/-40	-40/-40
Airflow at 0 Static Pressure:			
Internal loop 50 Hz (CFM / m³/hr.)	570/968	570/968	570/968
External loop 50 Hz (CFM / m³/hr.)	1443/2452	1443/2452	1443/2452
Internal loop 60 Hz (CFM / m³/hr.)	673/1143	673/1143	673/1143
External loop 60 Hz (CFM / m³/hr.)	1797/3053	1797/3053	1797/3053
Max. Heater W	2000	-	-

Electrical Data

Rated Voltage	230	460 V 1PH
Frequency (Hz)	50/60	50/60
Operating Range	+/-10%	+/-10%
Max. Power Consumption (W at 50/60 Hz)	4370/5060	7000/9200
Max. Nominal Current (A at 50/60 Hz)	19/22	10.5/12
Min. Circuit Ampacity (A)	25.2	12.6
Max. Overcurrent Protection (A)	35	20
Starting Current (A)	60	30
Agency Approvals	UL/cUL Listed, CE, EAC	UL/cUL Listed, CE, EAC
Power Input Description	Terminal block	Terminal block

Enclosure Protection

UL Type	Type 12, 3R, 4 standard Type 4X Stainless steel optional
---------	---

Controller

Description	Basic mechanical thermostat
Thermostat Location	Enclosure side on all base models
Factory Thermostat Setting (°F/°C)	80/27

Sound Level

At 1.5 Meters	71 dB(A)
---------------	----------

Unit Construction


Material	Galvanized sheet metal standard Stainless steel optional
Finish	RAL 7035 light-gray, semi-textured powder-coat paint standard

Unit Dimensions


Height (in/mm)	61.77/1568.96	61.77/1568.96
Width (in/mm)	19.91/505.71	19.91/505.71
Depth (in/mm)	17.36/440.94	17.36/440.94
Weight (lb/kg)	218/99.1	258/117

Performance Curves for T62 Models 20000 BTU/Hr. (5860 Watt)



T62-22x6-GXXX R-407c Capacity Curves 50 Hz

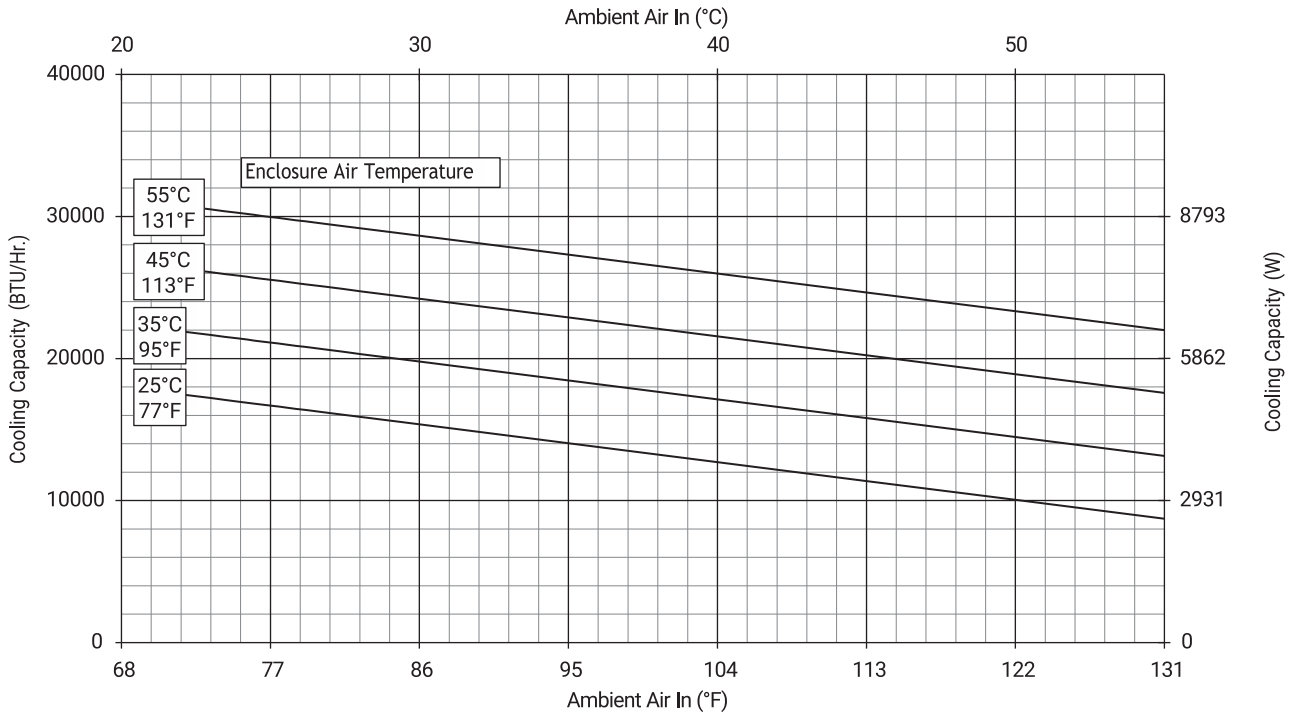


T62-22x6-GXXX R-407c Capacity Curves 60 Hz

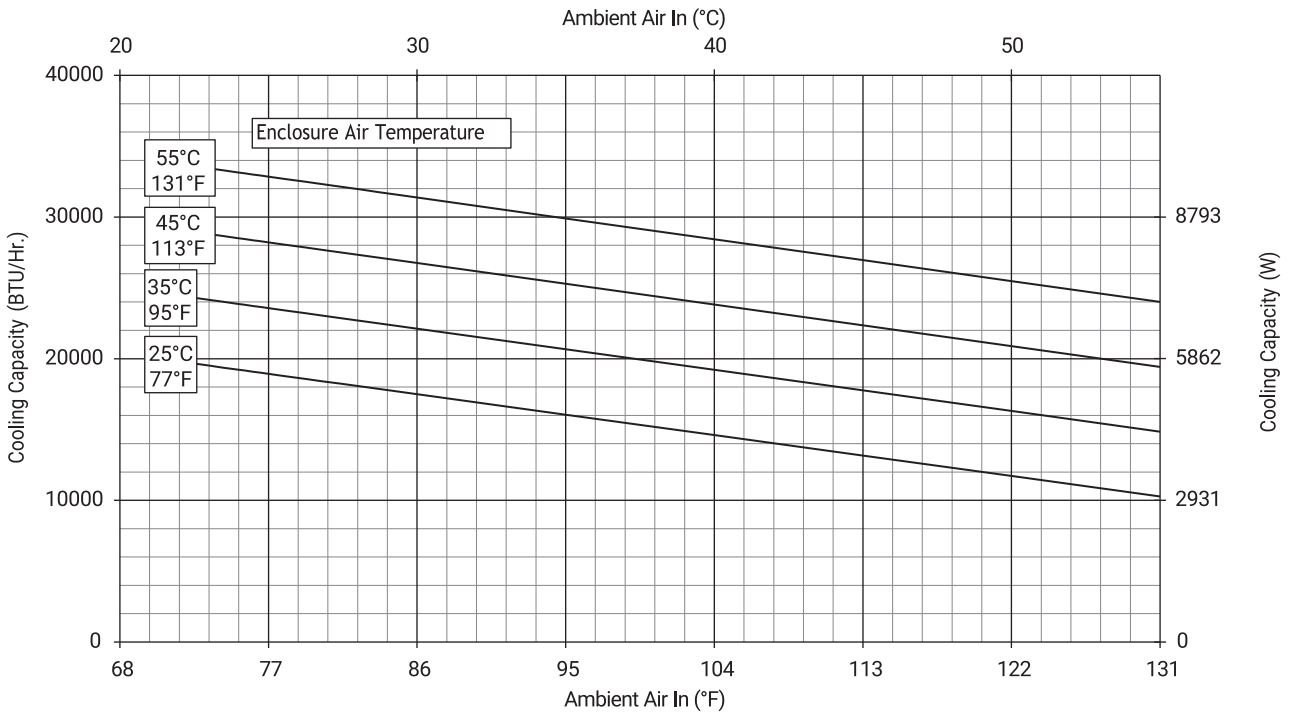

T62 Models 20000 BTU/Hr. (5860 Watt)

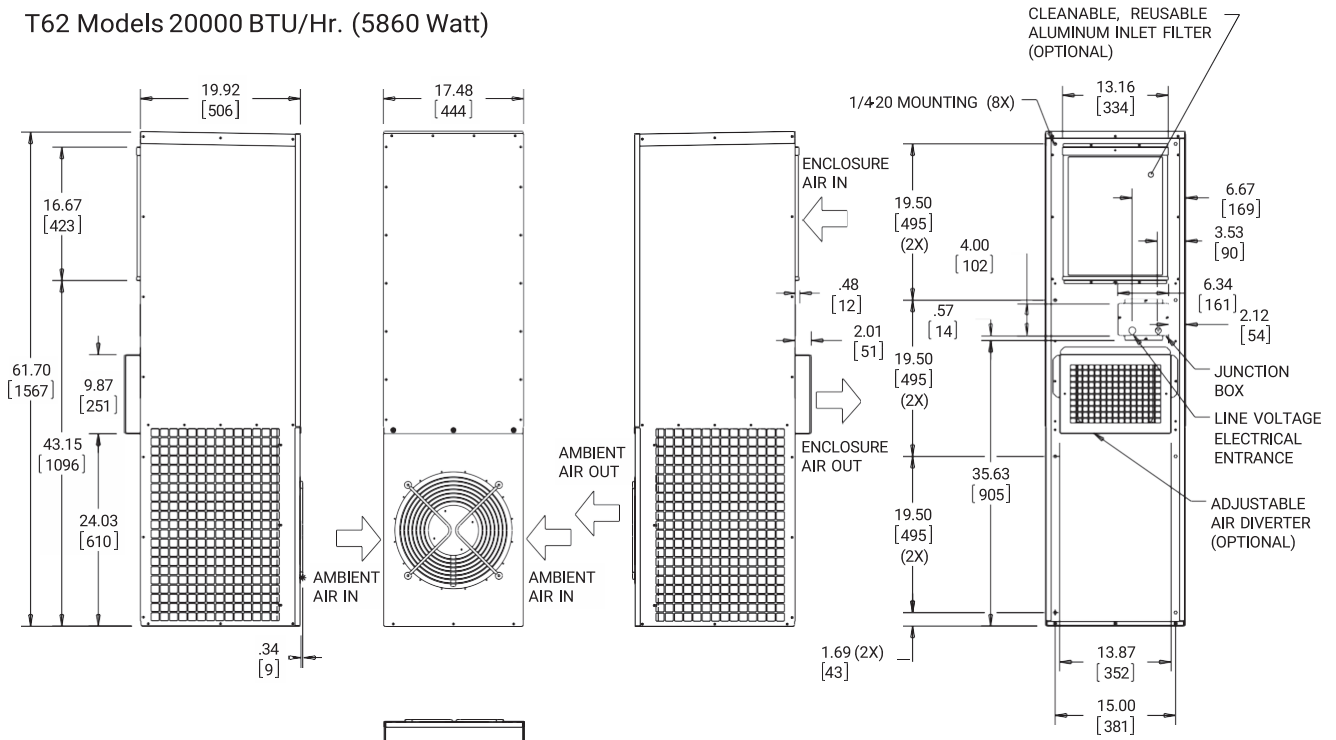

NOTE:
 1. MOUNTING GASKET SUPPLIED (NOT SHOWN).
 2. UNITS: in. [mm]

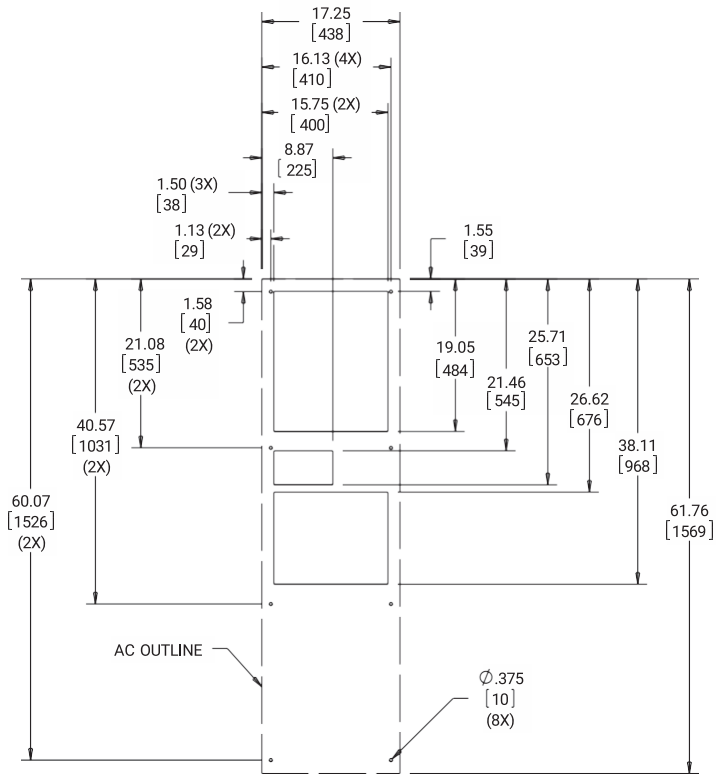

Cutout Dimensions

89043921

Visit www.nVent.com/HOFFMAN to download 2D and 3D CAD drawings into the overall design of your electrical system.

PERFORMANCE DATA T70-36 36000 BTU/HR. (10548 WATT) MODELS

Catalog Number

Outdoor Model with Heat Pkg.	T703626G150	-
Outdoor Model without Heat Pkg.	-	T703646G400

Cooling Performance

Nominal:		
BTU/Hr.	39000/43000	39000/43000
Watts	11430/12602	11430/12602
At 131°F/131°F (55°C/55°C):		
BTU/Hr. (50/60 Hz)	38613/42930	38613/42930
W (50/60 Hz)	11316/12570	11316/12570
At 95°F/95°F (35°C/35°C):		
BTU/Hr. (50/60 Hz)	31364/36130	31364/36130
W (50/60 Hz)	9192/10579	9192/10579
Refrigerant	R-407C	R-407C
Refrigerant Charge (ounces/grams)	110/3118	110/3118
Operating Temperature Range:		
Maximum (°F/°C)	131/55	131/55
Minimum (°F/°C)	-40/-40	-40/-40
Airflow at 0 Static Pressure:		
Internal loop 50 Hz (CFM / m ³ /hr.)	1085/1843	1085/1843
External loop 50 Hz (CFM / m ³ /hr.)	2176/3697	2176/3697
Internal loop 60 Hz (CFM / m ³ /hr.)	1171/1989	1171/1989
External loop 60 Hz (CFM / m ³ /hr.)	2347/3987	2347/3987
Max. Heater W	2000	-

Electrical Data

Rated Voltage	230	460
Frequency (Hz)	50/60	60
Operating Range	+/-10%	+/- 10%
Max. Power Consumption (W at 50/60 Hz)	8280	8280
Max. Nominal Current (A at 50/60 Hz)	36	18
Min. Circuit Ampacity (A)	40	20
Max. Overcurrent Protection (A)	50	25
Starting Current (A)	104	52
Agency Approvals	UL/cUL Listed, CE, EAC	
Power Input Description	Terminal block	

Enclosure Protection

UL Type	Type 12, 3R, 4 standard, Type 4X Stainless steel optional
---------	---

Controller

Description	Basic mechanical thermostat
Thermostat Location	Enclosure side on all base models
Factory Thermostat Setting (°F/°C)	80/27

Sound Level

At 1.5 Meters	66 dB(A)
---------------	----------

Unit Construction


Material	Galvanized sheet metal standard, Stainless steel optional
Finish	RAL 7035 light-gray, semi-textured powder-coat paint standard

Unit Dimensions


Height (in/mm)	69.8/1772
Width (in/mm)	22.8/578
Depth (in/mm)	20.94/532
Weight (lb/kg)	260/118

Performance Curves for T70 Models 36000 BTU/Hr. (10548 Watt)



T70-36X6-GXXXR-407c Capacity Curves 50 Hz

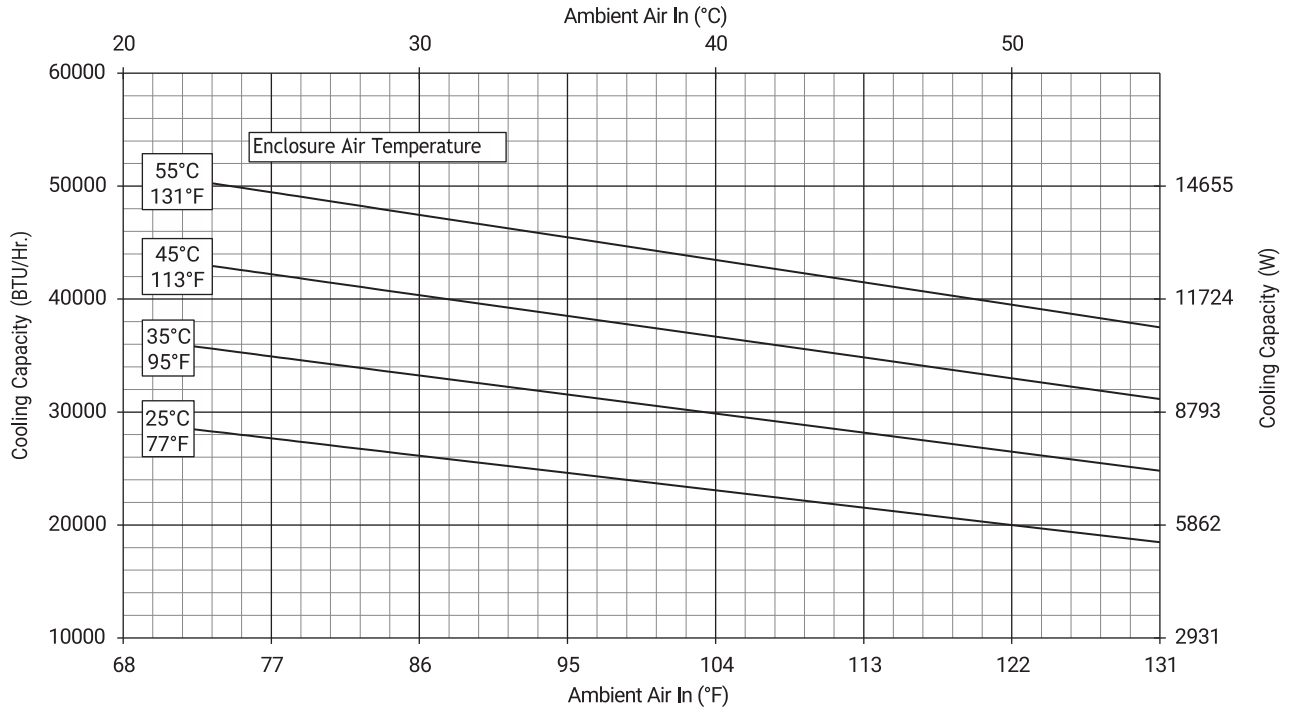


T70-36X6-GXXXR-407c Capacity Curves 60 Hz

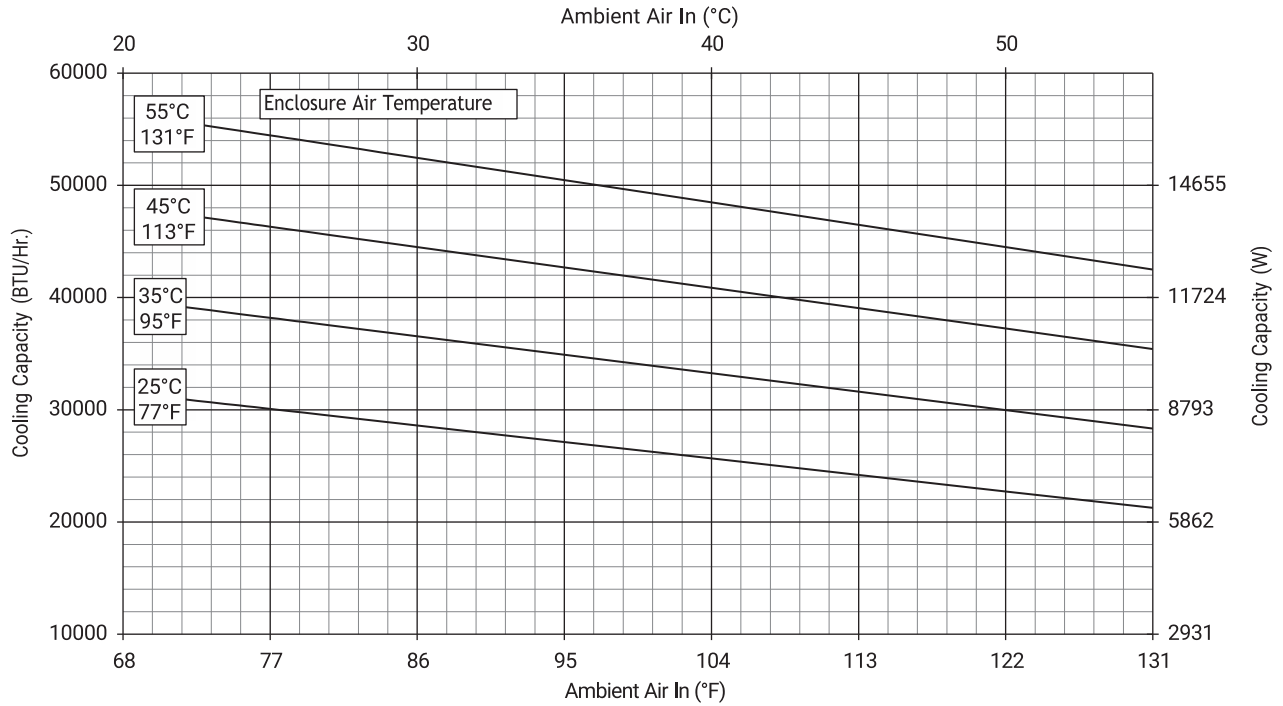

T70 Models 36000 BTU/Hr. (10548 Watt)

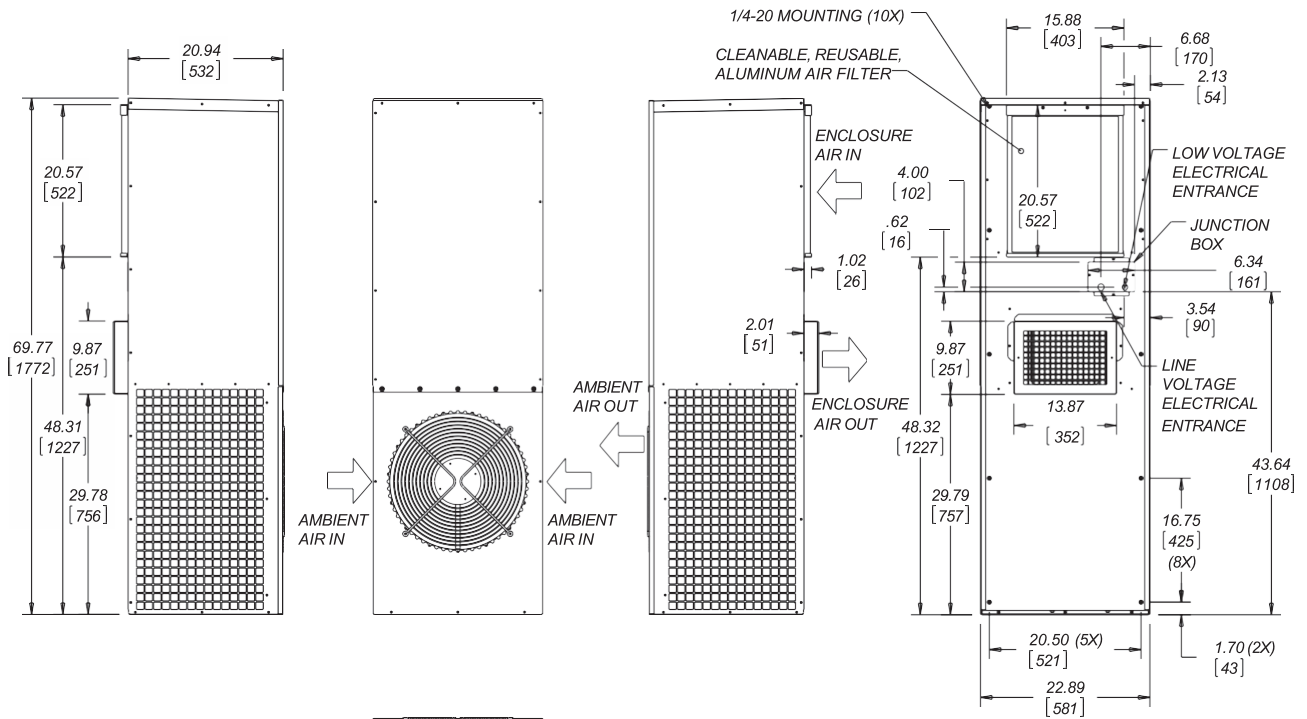

NOTE:
 1. MOUNTING GASKET SUPPLIED (NOT SHOWN).
 2. UNITS: in. [mm]

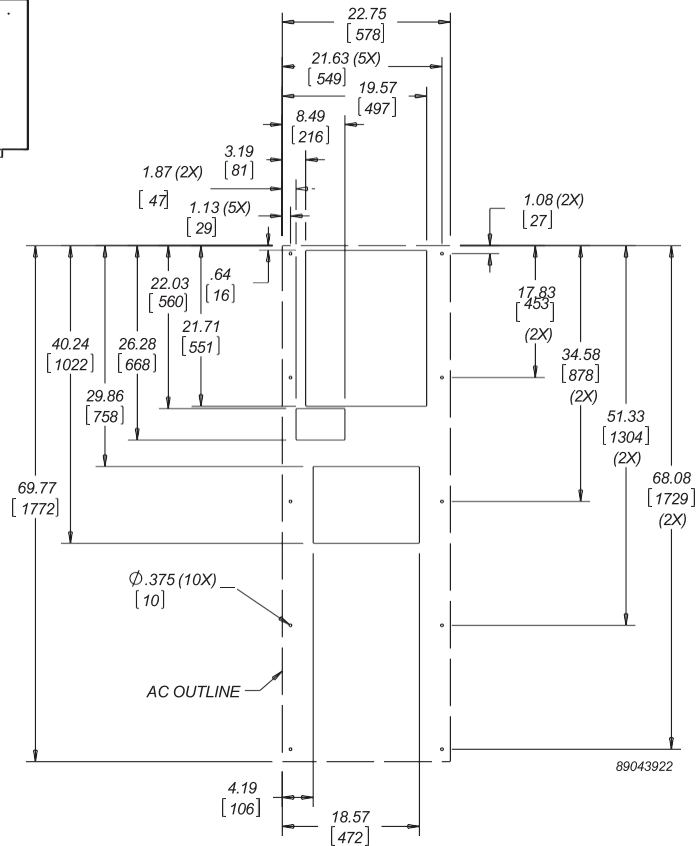

Cutout Dimensions

Visit www.nVent.com/HOFFMAN to download 2D and 3D CAD drawings into the overall design of your electrical system.

PERFORMANCE DATA T70-60 59000 BTU/HR. (17287 WATT) MODELS

Catalog Number

Outdoor Model with Heat Pkg.	T706026G150	-
Outdoor Model without Heat Pkg.	-	T706046G400

Cooling Performance

Nominal:		
BTU/Hr.	51900/60000	51900/60000
Watts	15210/17584	15210/17584
At 122°F/122°F (50°C/50°C):		
BTU/Hr. (50/60 Hz)	51900/60000	51900/60000
W (50/60 Hz)	15210/17584	15210/17584
At 95°F/95°F (35°C/35°C):		
BTU/Hr. (50/60 Hz)	47122/54500	47122/54500
W (50/60 Hz)	13810/15972	13810/15972
Refrigerant	R-407C	R-407C
Refrigerant Charge (ounces/grams)	150/4252	150/4252
Operating Temperature Range:		
Maximum (°F/°C)	122/50	122/50
Minimum (°F/°C)	-40/-40	-40/-40
Airflow at 0 Static Pressure:		
Internal loop 50 Hz (CFM / m³/hr.)	1510/2565	1510/2565
External loop 50 Hz (CFM / m³/hr.)	2716/4614	2716/4614
Internal loop 60 Hz (CFM / m³/hr.)	1629/2767	1629/2767
External loop 60 Hz (CFM / m³/hr.)	2931/4979	2931/4979
Max. Heater W	2000	-

Electrical Data

Rated Voltage	200/230	420/460
Frequency (Hz)	50/60	50/60
Operating Range	+/- 10%	+/- 10%
Max. Power Consumption (W at 50/60 Hz)	7000/9200	6426/7038
Max. Nominal Current (A at 50/60 Hz)	35/40	15.3
Min. Circuit Ampacity (A)	58	29
Max. Overcurrent Protection (A)	60	30
Starting Current (A)	144	144
Agency Approvals	UL/cUL Listed, CE, EAC, others available upon request	
Power Input Description	Terminal block,	

Enclosure Protection

UL Type	Type 12, 3R, 4 standard, Type 4X Stainless steel optional
International Rating	IP56 on the internal loop; IP34 on the external loop
Description	Basic mechanical thermostat

Controller

Thermostat Location	Enclosure side on all base models
Factory Thermostat Setting (°F/°C)	80/27

Sound Level

At 1.5 Meters	66 dB(A)
---------------	----------



Unit Construction

Material	Galvanized sheet metal standard, Stainless steel optional
Finish	RAL 7035 light-gray, semi-textured powder-coat paint standard

Unit Dimensions

Height (in/mm)	69.77/1772
Width (in/mm)	35.86/911
Depth (in/mm)	22.94/583
Weight (lb/kg)	419/190.5

Performance Curves for T70 Models 59000 BTU/Hr. (17287 Watt)

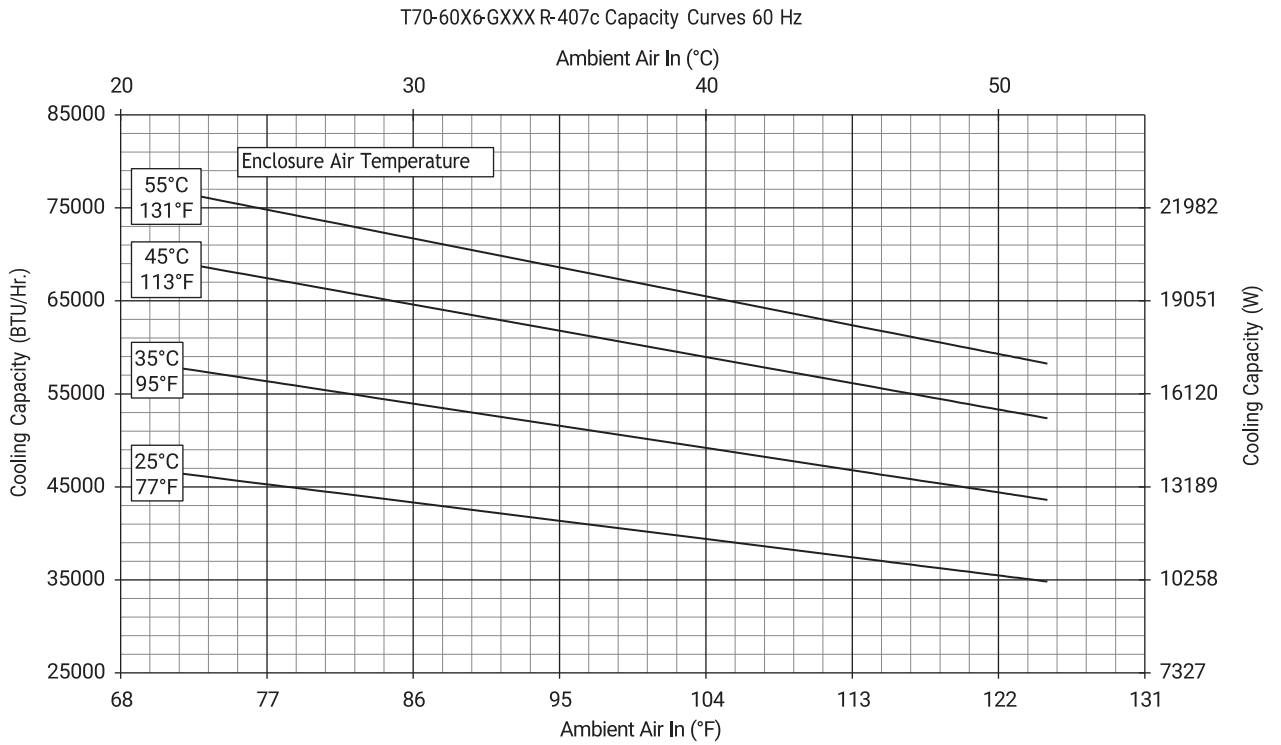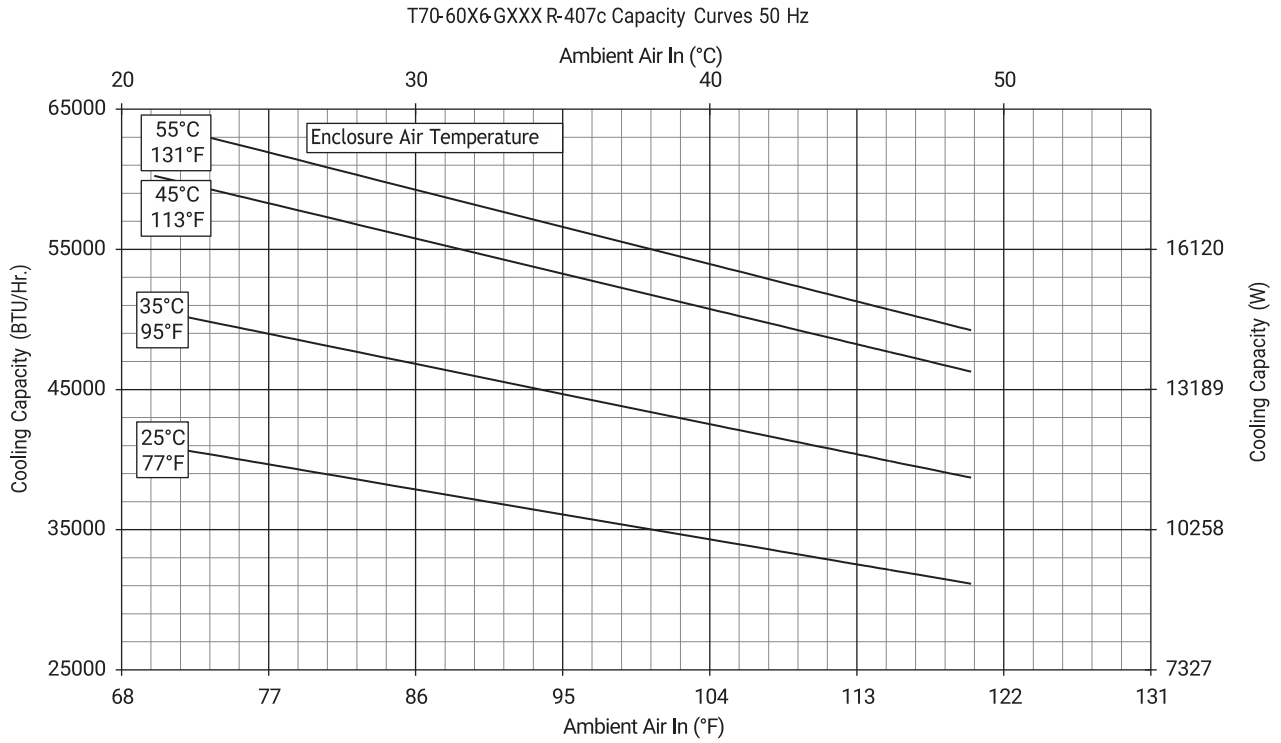

PERFORMANCE DATA T70-60 3~ 60000 BTU/HR. (17595 WATT) MODELS

Catalog Number

Outdoor Model without Heat Pkg.	T706046G460
---------------------------------	-------------

Cooling Performance

Nominal:	
BTU/Hr.	60,000
Watts	17,595
At 119°F/119°F (48°C/48°C):	
BTU/Hr. (50/60 Hz)	52993/60317
W (50/60 Hz)	15540/17688
At 95°F/95°F (35°C/35°C):	
BTU/Hr. (50/60 Hz)	49404/53995
W (50/60 Hz)	14488/15834
Refrigerant	R407C
Refrigerant Charge (ounces/grams)	140/3969
Operating Temperature Range:	
Maximum (°F/°C)	119/48
Minimum (°F/°C)	-40/-40
Airflow at 0 Static Pressure:	
Internal loop 50 Hz (CFM / m ³ /hr.)	1510/2565
External loop 50 Hz (CFM / m ³ /hr.)	2716/4614
Internal loop 60 Hz (CFM / m ³ /hr.)	1629/2767
External loop 60 Hz (CFM / m ³ /hr.)	2931/4979
Max. Heater W	-

Electrical Data

Rated Voltage	460 V 3-Phase
Frequency (Hz)	50/60
Operating Range	6%/+10%
Max. Power Consumption (W at 50/60 Hz)	8150 / 10200
Max. Nominal Current (A at 50/60 Hz)	14/16
Min. Circuit Ampacity (A)	16.7/18.8
Max. Overcurrent Protection (Cooling) (A at 50/60Hz)	25/30
Starting Current (A)	63
Agency Approvals	UL/cUL, CE
Power Input Description	Terminal Block

Enclosure Protection

UL Type	Type 12, 3R, 4
IEC Type Rating	IP56 on the internal loop; IP34 on the external loop

Controller

Description	24 V Control Terminal Strip
Thermostat Location	N/A
Factory Thermostat Setting (°F/°C)	N/A

Sound Level

At 1.5 Meters	66 dB(A)
---------------	----------


Unit Construction

Material	Galvanized sheet metal standard
Finish	RAL 7035 light-gray, semi-textured powder-coat paint standard


Unit Dimensions

Height (in/mm)	69.77/1772
Width (in/mm)	35.86/911
Depth (in/mm)	22.94/583
Weight (lb/kg)	419/190.5


T70-6046-GXXX R-407c 3~ Capacity Curves at 50 Hz

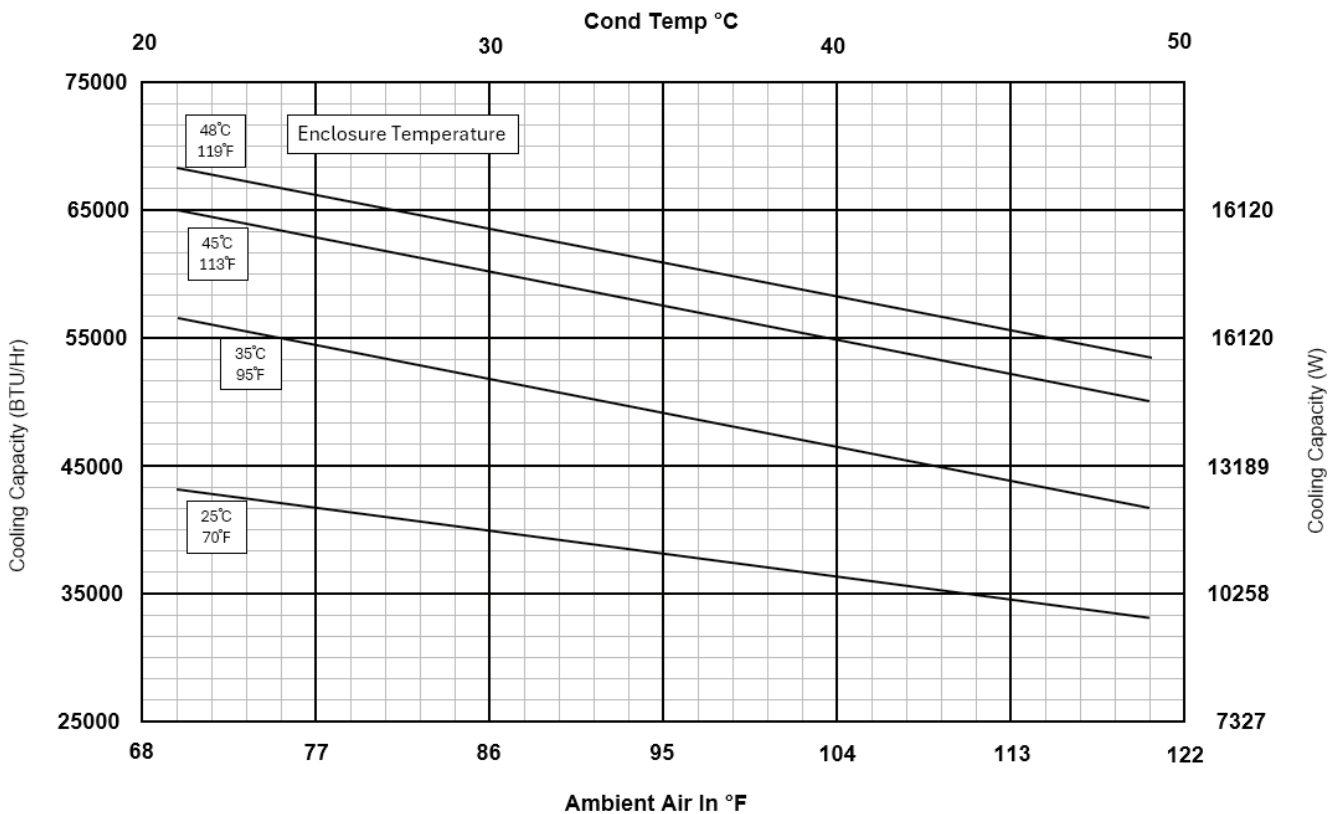

T70-6046-GXXX R-407c 3~ Capacity Curves at 60 Hz

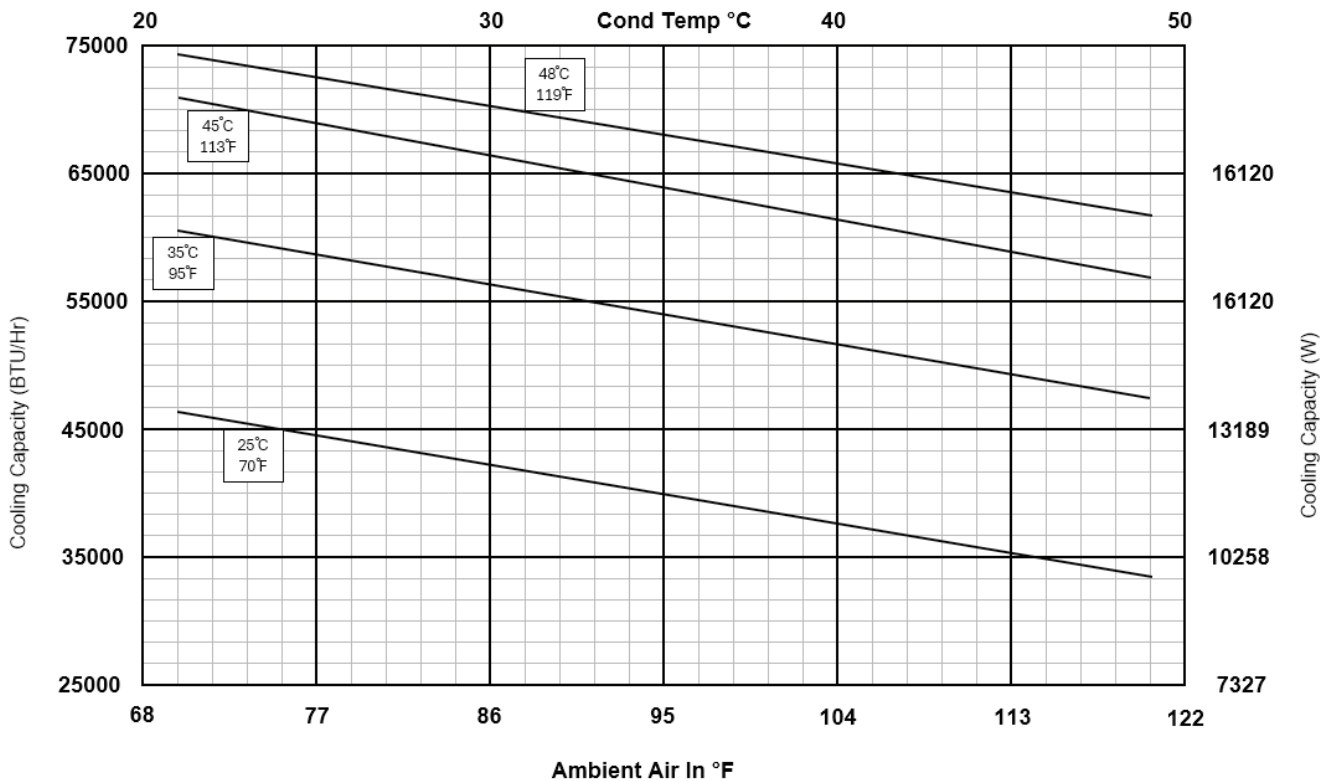

T70 1 Phase 59000 BTU/Hr. (17287 Watt) / 3 Phase 60000 BTU/Hr. (17595 Watt)

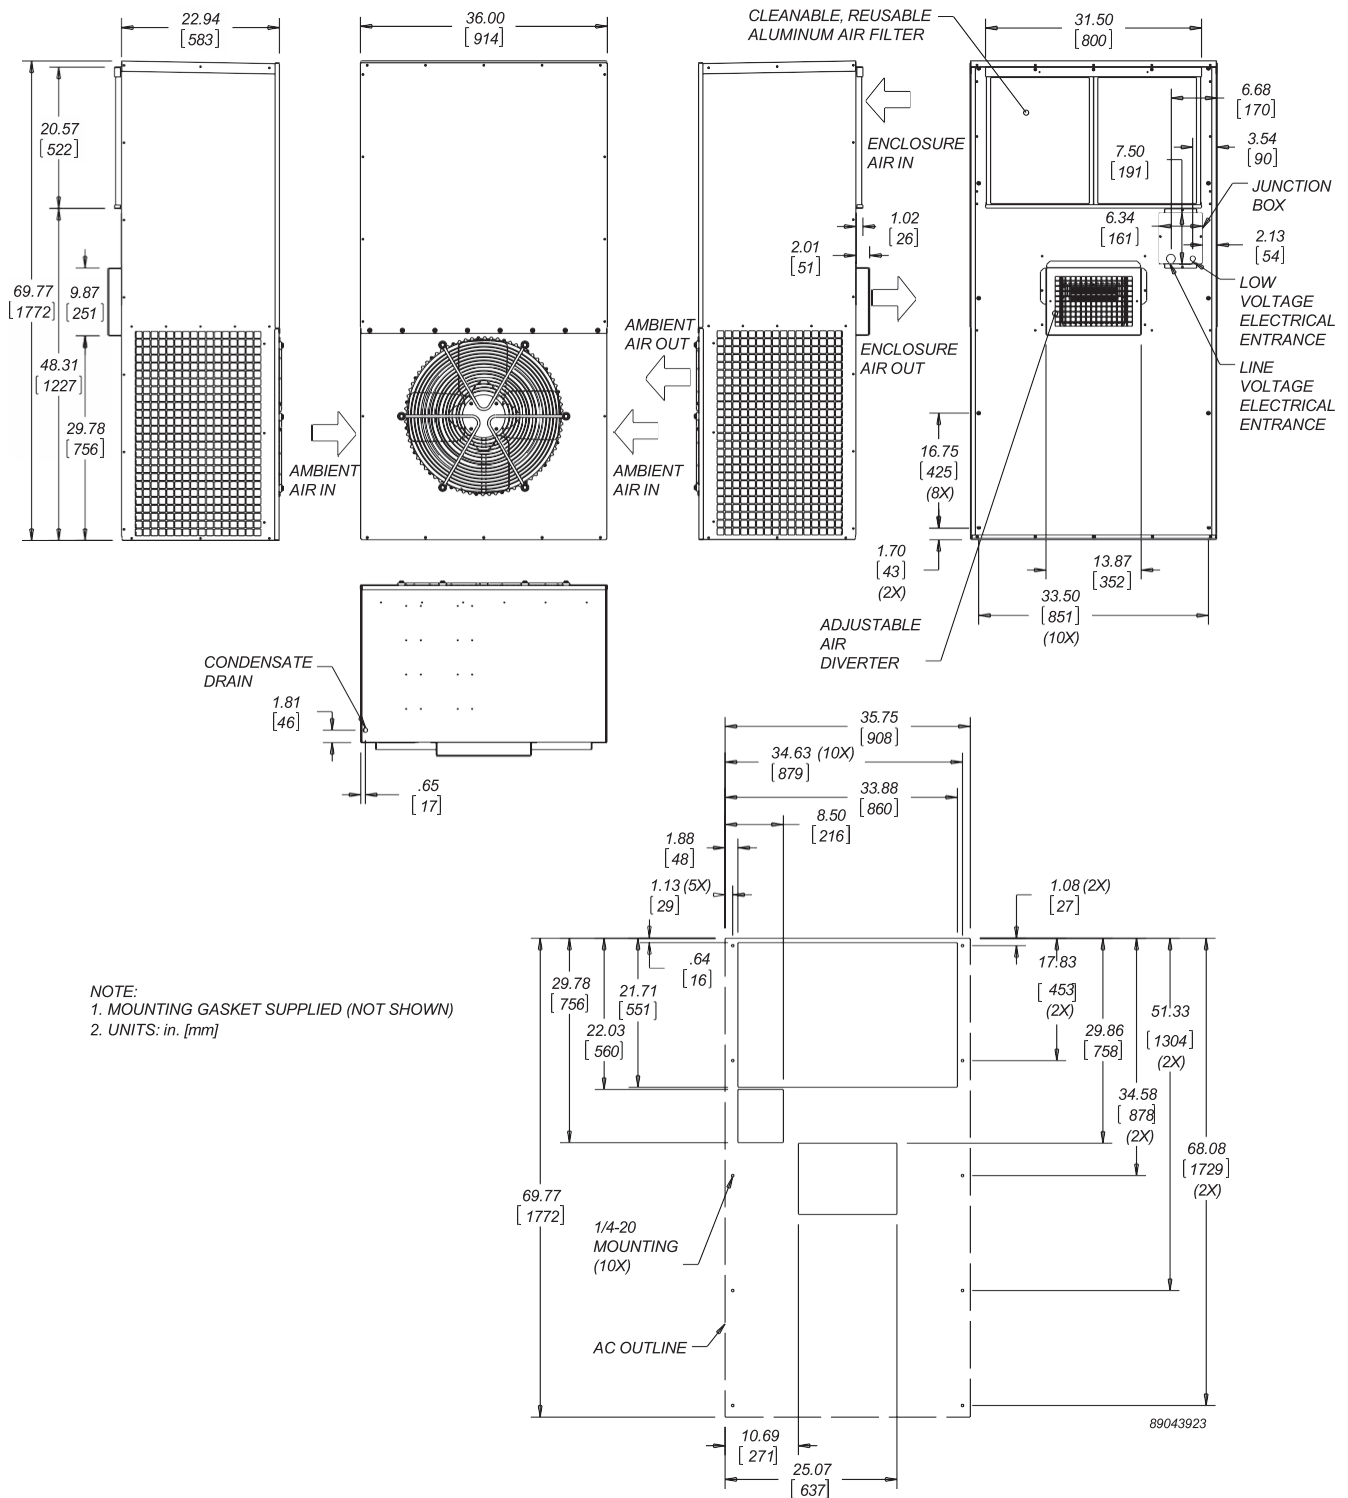

Cutout Dimensions

Visit www.nVent.com/HOFFMAN to download 2D and 3D CAD drawings into the overall design of your electrical system.



Our powerful portfolio of brands:

CADDY ERICO HOFFMAN ILSCO SCHROFF TRACHTE