

nVent CADDY Superfix 243 M8/M10, 15-19 mm OD, 3/8" Pipe, 10 DN

???

SXD019



??



??

Includes easy closing mechanism

Combo head bolt works with slotted, hex, or Phillips drivers

Category II noise reduction according to DIN EN ISO 3822-1

Compliant for sound insulation design according to DIN 4109

Reaction-to-fire classification is "E" in compliance with DIN EN 13501-1

????

???: 400064

??: ?;EPDM-SBR ??

??: ???

??: ??

??: -50 to 110 °C

?? (OD): 15 - 19 mm

????: 3/8"

NB/DN: 10

?? (RS): M8;M10

?? (W): 20 mm

?? (T): 1.2 mm

???? (Sc): 5


???? (L): 25mm

????: 1000N

??????

Lining is EPDM rubber.

?

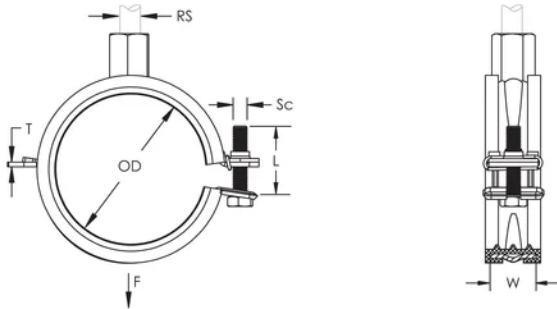

??

???? nVent ?????????????????? nVent ??????? www.nvent.com ?????????????? nVent ?????????????????????????????????????? nVent
??/??????????????

??
+1.800.753.9221
?? 1 ??????
?? 2 ??????

??
???
+31 800-0200135
???
+33 800 901 793

??
???
800 1890272
????/???
+31 13 5835404

????
???
+ 86 21 2412 1618/19
???
+61 2 9751 8500



???????????:

CADDY ERICO HOFFMAN ILSCO SCHROFF TRACHTE

