

# Strut Seismic Hinge Bracket Assembly

## Data Solutions



??



??

Used for installations where strut brace is parallel to structure

One wrench size fits all required hardware, eliminating the need to change tools

Shear-off head helps ensure correct torque and simplifies inspection

????

□□ : □□□


□□ : □

Table 1/1

□□□	□□□	□□□ (HS)	□□ (W)	□□ (T)	A	B
CSBUS2PA	404603	20.6mm	40.6mm	6.4mm	177.8mm	47.8mm
CSBUS1PA	404602	14.3mm	40.6mm	6.4mm	177.8mm	47.8mm

FM Loads					
Part Number	Brace Member	Horizontal Capacity per Installation Angle from Vertical			
		30° - 44°	45° - 59°	60° - 74°	75° - 90°
CSBUS1PA	41 x 41 Strut Channel	5160 N	8290 N	8290 N	7470 N
CSBUS2PA	41 x 41 Strut Channel	5160 N	8290 N	8290 N	7470 N

?

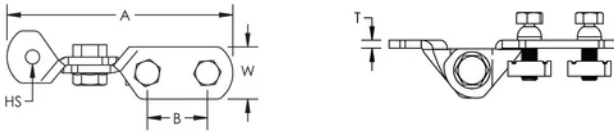

??

??? nVent ?????????????????? nVent ??????? www.nvent.com ???????????? nVent ??? nVent  
 ???



??????????:  
 CADDY ERICO HOFFMAN ILSCO SCHROFF TRACHTE