

# nVent CADDY Macrofix Insulated M8/M10, 309-319 mm OD

???

## MFD319



??



??

Return-lip on the hanger prevents the rubber from detaching, eliminating rework during installation

Plastic washer prevents screws from falling out during installation

Combo head bolt works with slotted, hex, or Phillips drivers

Longer ears position the screw farther from the hanger, improving tool clearance when the screw is tightened

Combination nut can be attached to M8 or M10 threaded rod, simplifying material handling

Screw length has been optimized to accommodate an increased pipe range, reducing inventory?

Category II noise reduction according to DIN EN ISO 3822-1

Compliant for sound insulation design according to DIN 4109

Reaction-to-fire classification is "E" in compliance with DIN EN 13501-1

????

??? : 586025

?? : ?;EPDM-SBR ??

?? : ???

?? : -50 to 110 °C


?? : ??

|                       |
|-----------------------|
| ?? (OD): 309 - 319 mm |
| ??? (RS): M8;M10      |
| ?? (W): 30 mm         |
| ?? (T): 2.5 mm        |
| ???? (Sc): 6          |
| ???? (L): 37mm        |
| ????: 4000N           |

??????

Lining is EPDM rubber.

?

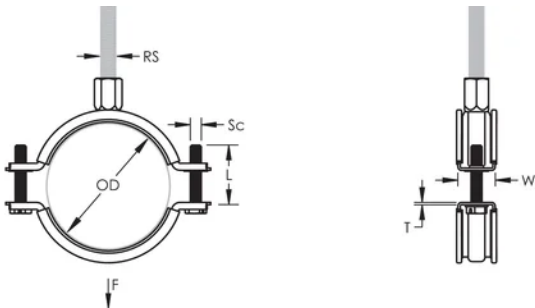

??

???? nVent ?????????????????? nVent ??????? [www.nvent.com](http://www.nvent.com) ???????????? nVent ?????????????????????????????????????? nVent  
????????????????????????????????????????????????????????????/??????????????

|                 |                 |                |                      |
|-----------------|-----------------|----------------|----------------------|
| ??              | ??              | ??             | ????                 |
| +1.800.753.9221 | ???             | ???            | ???                  |
| ?? 1 ?????      | +31 800-0200135 | 800 1890272    | + 86 21 2412 1618/19 |
| ?? 2 ?????      | ???             | ????/???       | ???                  |
|                 | +33 800 901 793 | +31 13 5835404 | +61 2 9751 8500      |



?????????: CADDY ERICO HOFFMAN ILSCO SCHROFF TRACHTE