

FleXbus


360 mm<sup>2</sup>

18,000 mm x 25 mm x 12.5 mm x 33.6 kg

Data Solutions

???

FLEXCORE360L18



nVent ERIFLEX FleXbus  
????????????????????????????????????????????????????????????  
????????????????????????????????FleXbus  
????????????????????????????????????????????????????????FleXbus  
???????????????? (LSHFFR) ????? II  
???????????????????????????? 2-25 ????????????????? 500A ?  
6300A ????????? 1600kVA ?????????????????????????  
3150kVA ?????????????

??



??

|                                                                                                                |
|----------------------------------------------------------------------------------------------------------------|
| ????????????????                                                                                               |
| ????????????????                                                                                               |
| ????????                                                                                                       |
| ????????                                                                                                       |
| ????????????????????????                                                                                       |
| ???? 400kVA (560 A) ? 1600kVA (2250 A) ????????????????????? 2000kVA (2800 A) ? 3150kVA (4435 A) ????????????? |
| FleXbus ?????????????????                                                                                      |

????

|                          |
|--------------------------|
| ??? : 508440             |
| ??? : 360mm <sup>2</sup> |

?? 1 (L1): 18000mm

?? 2 (L2): 50mm

????: ???

????: ???????

???: ?? GB/T 34016-2017 ? DIN EN 117 ???

?????: ??

?????: ?

?????: 500% min

????: 2.5 – 3.5mm

?????: UL® 2885; IEC® 60754-1; IEC® 62821-2

?????: IK09

?????: UL® 2556; UL® 854

?????: IEC® 61034-2; ISO 5659-2; UL® 2885

????: 20kV/mm

?????: UL® 94V-0

????: 0.2mm

?????IEC: 1000V; 5000V

???????EN 50264-3-1: 6000V

????: ?50 to 115°C

?: IEC® 60695-2-11??????? 960 °C?; IEC® 61439.1; IEC® 61439.1 II ?; IEC® 60364

?T 60 K: 901A

?? 1 (W1): 58mm

?? 2 (W2): 50mm

?? [1] (H1): 21.7mm

?? [2] (H2): 12.3mm

??? (HS): 11mm

????: 33.1kg

A: 25mm

C: 25mm

D: 12.5mm

2 ??????????: 1.52


2 ??????????: 2

????: AS 3008; BS 7671; CEI 64-8; CSN; DIN VDE 0100; HD 384; IEC® 60364; NBR 5410; NEN 1010; NFC 15-100; NIBT-NIN; NP (2002); ÔNORM; REBT; RGIE-AREI

## ??????

????????????????

| □□□□□□□□ |         |         |         |         |         |         |         |         |
|----------|---------|---------|---------|---------|---------|---------|---------|---------|
| ??       | ?T 30°C | ?T 40°C | ?T 45°C | ?T 50°C | ?T 55°C | ?T 60°C | ?T 65°C | ?T 70°C |
| ????     | 0.71    | 0.82    | 0.87    | 0.91    | 0.96    | 1.00    | 1.04    | 1.08    |

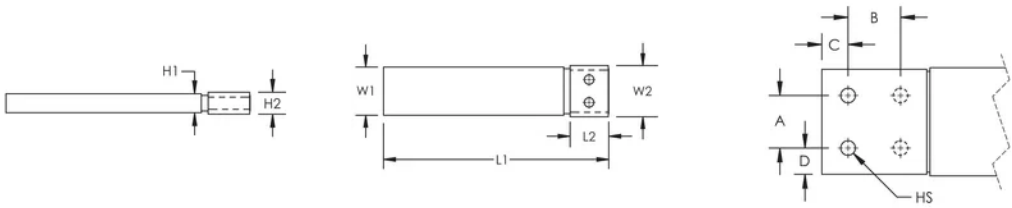

???? nVent ?????????????????? nVent ??????? www.nvent.com ???????????? nVent ????????????????????????????????????????? nVent  
????????????????????????????????????????????????????????????/??????????????



?????????????:  
CADDY ERICO HOFFMAN ILSCO SCHROFF TRACHTE