



## MCDS



The stainless steel double door combinable floor standing enclosure range, MCDS, is ideal for installation in confined spaces where a single door, when opened, would take up too much space in front of the enclosure. The doors' loading capacity also increases as it is divided over two doors. With a IP 55 protection degree, components inside the enclosure are well protected and makes it well suited for almost any environment, grade dependent.

### ????

cUL ????? CSA C22.2 No.0?No.0.4?No.14?No.94; Type 12; ???  
E92044

cUL Listed per CSA C22.2 No.0, No.0.4, No.14, No.94; Type 12;  
File No. E92044

NEMA/EEMAC Type 12

IEC 62208 IP55

CE, UK CA, UL, DNV

### ??

**Levering inkluderer:** Ramme med monterede døre, bagpanel, toppanel, bundplader, monteringsplade og dørramme. **Levering omfatter også** bolte til jording. Leveres på palle i samme bredde som skabet, så skabene kan kombineres uden at fjerne dem fra pallerne. Alt emballeringsmateriale kan genbruges.}

**Material:** AISI 304L pre-grained stainless steel / AISI 316L. **Frame:** 1.5 mm. **Door:** 2 mm. **Rear, roof and side panels:** 1.5 mm. **Bottom plates:** 1.5 mm stainless steel. **Mounting plate:** 3 mm galvanized steel.

**Frame:** Seam welded reversed open profiles with 25 mm hole pattern, according to DIN 43660.

**Door:** Mounted with four hinges. Including door frame with 25 mm hole pattern. Doors cannot be reversed. Separate doors to be ordered for left hand door locking.

**Rear panel:** Fitted by M6 torx screws. Standard facilities for rear door mounting. Split rear panels in 1600 mm wide enclosures.

**Side panels:** Supplied as an accessory.

**Roof panel:** Removable.

**Lock:** Espagnolette 4-point locking system in the main door and 2-point locking system in the secondary door. Standard double-bit lock with 3 mm insert. Standard inserts, cylinders, lift handles and T-handle are available as accessories.

**Bottom plates:** Two piece bottom plate in 1200 mm width, with injected polyurethane gasket to ensure maximum sealing.

**Mounting plate:** Double folded and adjustable in depth by steps of 25 mm, with the MPD02 accessory. Mounting plate is delivered, attached on the outside of the enclosure packaging.

**Earthing:** All panels are earthed through their fittings and are equipped with a separate earthing stud.

**Finish:** 400 pre-grained stainless steel.

**Protection:** Complies with IP 55 | TYPE 12 | IK 10.

**Mounting requirements:** Standard delivery ready for combined installation. For stand-alone installation, add side panels.

????

□□□ : 1.5mm


□□ : 2mm

□□ : □□

Table 1/1

□□	□□	□□ (H)	□□ (W)	□□ (D)	□□
MCDS18105-316		1800mm	1000mm	500mm	□□ 316
MCDS20126	MCDS20126	2000mm	1200mm	600mm	□□
MCDS20126-316		2000mm	1200mm	600mm	□□ 316
MCDS18125		1800mm	1200mm	500mm	□□ 304
MCDS18125-316		1800mm	1200mm	500mm	□□ 316
MCDS18105		1800mm	1000mm	500mm	□□ 304

?

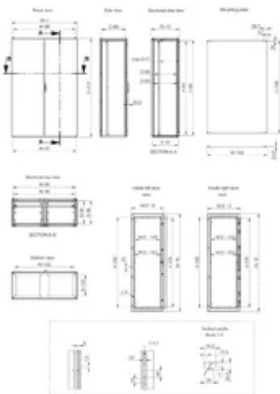

??

???? nVent ?????????????????? nVent ??????? www.nvent.com ??????????? nVent ?????????????????????????????????????? nVent  
??/????????????



?????????:

CADDY ERICO HOFFMAN ILSCO SCHROFF TRACHTE