


P14 Position Coupler, Stainless Steel, 20 mm, #6, 20M, 35 mm dia, 152 mm x 163 mm, 35 mm Bar Depth

???

EL20P14LSSN



Stainless steel couplers are specified whenever corrosive environmental conditions combine with the need for high load-bearing strength. nVent LENTON stainless steel couplers are commonly used when the construction materials may come into contact with de-icing salts, salt water or marine environments. Typical applications include bridges and bridge decks.

??

Designed to splice the same diameter bars

Designed to splice two curved, bent or straight bars, when neither bar can be rotated and where the ongoing bar is free to move in its axial direction

Duplex 2205 stainless steel provides a unique combination of strength and corrosion resistance

????

??: ????? 2205 (EN 1.4462)

??: ??

?????: ??

??????: 20 mm

??????: #6

??????: 20M

?? (Ø): 35 mm

?? 1 (L1): 152 mm

?? 2 (L2): 163 mm

?? (BD): 35mm

??? 1 (BG1): 82mm

??? 2 (BG2): 93mm

???? (CB): 76mm


????: 0.36 kg

????: AASHTO; ABNT NBR 8548:1984; ACI 318 1 ??125% ??????; ACI 318 2 ??????; ACI 349; ACI 359; AS3600

??????

Bar dimensions and weights listed may vary by region. Coupler sizes not shown may be available by special order. Contact your nVent LENTON representative for more information.

?

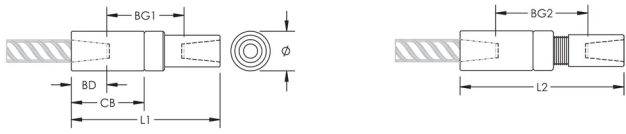

??

???? nVent ?????????????????? nVent ??????? www.nvent.com ??????????? nVent ??? nVent ???/??????????????

??
+1.800.753.9221
?? 1 ??????
?? 2 ??????

??
???
+31 800-0200135
???
+33 800 901 793

??
???
800 1890272
????/???
+31 13 5835404

????
???
+ 86 21 2412 1618/19
???
+61 2 9751 8500



???????????:

CADDY ERICO HOFFMAN ILSCO SCHROFF TRACHTE