


mm

PC 280 mm 2

???

64568-080

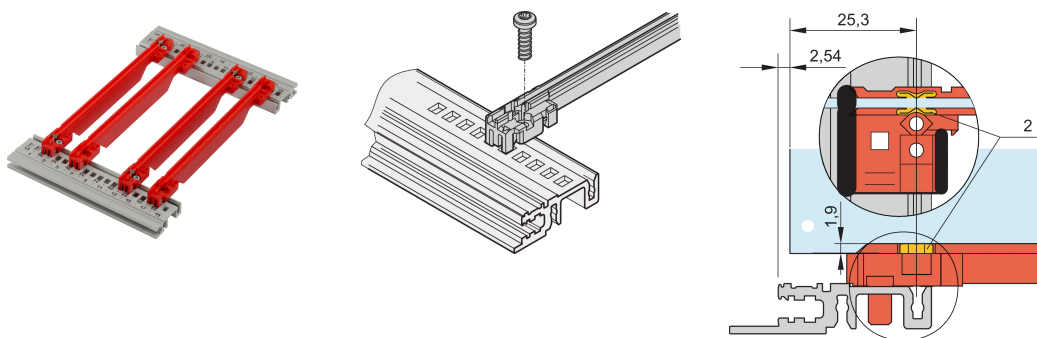

PCB Which means the material ensures a low flammability, low smoke toxicity and density and fulfills the EN 45545-2 (Fire Safety in Railway Vehicle) requirements sets R22, R23 and R24 with the highest hazard level HL3. IEC 61249- 2-21“”

??



??

PCB

, , , , ,

, EN 45545-2 R22, R23 R24 HL3

“, IEC 61249-2-21

1.5 mm

H R

ESD PCB

-40 °C.. 130 °C

???

?: 1

?: 280mm

??: 2

??: ??

?: EN 45545-2

?: ???????

????: EuropacPRO; RatiopacPRO; RatiopacPRO AIR; CompacPRO; PropacPRO; MultipacPRO; Inpac

????: ??

?: ???

?: ??; ???; 19" ??; ??

Net Weight: 0.012kg

??????

????????????????????????????????5 ??10 ??50 ????????????????????? 2 ?????????????????????

??

???? nVent ????????????????? nVent ??????? www.nvent.com ??????????? nVent ????????????????????????????????? nVent
??/????????????

North America
All locations
+1.763.422.2661
Chat with us:
nvent.com/schroff

Europe
Straubenhardt, Germany
+49.7082.794.0
Betschdorf, France
+33.3.88.90.64.90
Warsaw, Poland
+48.22.209.98.35
Assago, Italy
+39.02.932.7141
Chat with us:
nvent.com/schroff

Asia
Shanghai, China
+86.21.2412.6943
Qingdao, China
+86.532.8771.6101
Singapore
+65.6768.5800
Shin-Yokohama, Japan
+81.45.476.0271
Chat with us:
nvent.com/schroff

Middle East & India
Dubai, United Arab
Emirates
+971.4.378.1700
Bangalore, India
+91.80.6715.2001
Istanbul, Turkey
+90.216.250.7374
Chat with us:
nvent.com/schroff



??????????:

CADDY ERICO HOFFMAN ILSCO SCHROFF TRACHTE