

nVent CADDY Speed Link SLK with Angle Bracket



CERTIFICERINGER



FUNKTIONER

Complete system includes wire, locking device and pre-assembled angle bracket end fitting

Ideal for attaching to concrete, steel or wood surfaces

Simple alternative to jack chain and additional hardware

SPECIFIKATIONER

Static Load Safety Factor:	5:1
Finish:	Electrogalvanized
Materiale:	Stål; Zinc Alloy; Polypropylene
Complies With:	SMACNA HVAC-DCS

Table 1/2


Katalognummer	Artikelnummer	Wire Rope Diameter	Wire Rope Length	A	Hole Size (HS)	Height (H)
SLK3L2AB	196713	3 mm	2m	22.6 mm	7.1 mm	62 mm
SLK15L2AB	196501	1.5 mm	2m	22.6 mm	7.1 mm	55 mm

Katalognummer	Artikelnummer	Wire Rope Diameter	Wire Rope Length	A	Hole Size (HS)	Height (H)
SLK3L10AB	196716	3 mm	10m	22.6 mm	7.1 mm	62 mm
SLK2L3AB	196530	2 mm	3m	22.6 mm	7.1 mm	55 mm
SLK2L2AB	196529	2 mm	2m	22.6 mm	7.1 mm	55 mm
SLK3L5AB	196715	3 mm	5m	22.6 mm	7.1 mm	62 mm
SLK15L1AB	196500	1.5 mm	1m	22.6 mm	7.1 mm	55 mm
SLK2L5AB	196531	2 mm	5m	22.6 mm	7.1 mm	55 mm
SLK15L3AB	196502	1.5 mm	3m	22.6 mm	7.1 mm	55 mm
SLK15L5AB	196503	1.5 mm	5m	22.6 mm	7.1 mm	55 mm

Table 2/2

Katalognummer	Artikelnummer	Width (W)	Thickness (T)	Angle (a)	Static Load	Certificeringer
SLK3L2AB	196713	24 mm	16 mm	90 ° Max	890N	
SLK15L2AB	196501	19 mm	12.5 mm	90 ° Max	195N	ITB, UL, cUL
SLK3L10AB	196716	24 mm	16 mm	90 ° Max	890N	
SLK2L3AB	196530	19 mm	12.5 mm	90 ° Max	440N	UL, ITB, cUL
SLK2L2AB	196529	19 mm	12.5 mm	90 ° Max	440N	ITB, UL, cUL
SLK3L5AB	196715	24 mm	16 mm	90 ° Max	890N	
SLK15L1AB	196500	19 mm	12.5 mm	90 ° Max	195N	cUL, ITB, UL
SLK2L5AB	196531	19 mm	12.5 mm	90 ° Max	440N	UL, cUL, ITB
SLK15L3AB	196502	19 mm	12.5 mm	90 ° Max	195N	UL, cUL, ITB
SLK15L5AB	196503	19 mm	12.5 mm	90 ° Max	195N	UL, ITB, cUL

DIAGRAMS

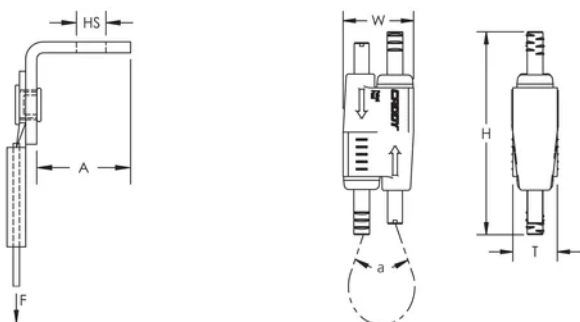

ADVARSEL

nVent-produkter skal kun installeres og anvendes som angivet i nVents produktvejledninger og træningsmaterialer. Vejledninger er tilgængelige på www.nvent.com og hos din nVent kundeservicerepræsentant. Forkert installation, misbrug, fejlanvendelse eller anden undladelse af fuldt ud at følge nVents instruktioner og advarsler kan medføre funktionsfejl, materielle skader, alvorlige personskader eller død og/eller ugyldiggøre din garanti.

North America

+1.800.753.9221

Option 1 – Customer Care

Option 2 – Technical

Support

Europe

Netherlands:

+31 800-0200135

France:

+33 800 901 793

Europe

Germany:

800 1890272

Other Countries:

+31 13 5835404

APAC

Shanghai:

+ 86 21 2412 1618/19

Sydney:

+61 2 9751 8500



Vores kraftfulde portefølje af mærker:

CADDY ERICO HOFFMAN ILSCO SCHROFF TRACHTE

