


nVent CADDY Speed Link SLK with Decking Hook



CERTIFICERINGER



FUNKTIONER

Complete system includes wire, locking device and pre-assembled decking hook end fitting

Quickly and easily attaches to hollow metal decking

Spring-loaded ends snap into decking hole and lock into place

Innovative design helps protect the wire from sharp edges of decking hole, minimizing risk of damage to wire

SPECIFIKATIONER

Static Load Safety Factor:	5:1
Finish:	Electrogalvanized
Materiale:	Stål; Zinc Alloy; Polypropylene
Complies With:	SMACNA HVAC-DCS

Table 1/2

Katalognummer	Artikelnummer	Wire Rope Diameter	Wire Rope Length	Roof Decking Sheet Thickness	A	Hole Size (HS)

SLK15L2DH	196677	1.5 mm	2m	1.5 mm Max	9.2 mm	8 mm
SLK2L3DH	196532	2 mm	3m	1.5 mm Max	9.2 mm	8 mm
SLK2L7DH	196534	2 mm	7m	1.5 mm Max	9.2 mm	8 mm
SLK15L5DH	196505	1.5 mm	5m	1.5 mm Max	9.2 mm	8 mm
SLK15L3DH	196504	1.5 mm	3m	1.5 mm Max	9.2 mm	8 mm
SLK2L5DH	196533	2 mm	5m	1.5 mm Max	9.2 mm	8 mm
SLK15L1DH	196676	1.5 mm	1m	1.5 mm Max	9.2 mm	8 mm

Table 2/2

Katalognummer	Artikelnummer	Static Load
SLK15L2DH	196677	195N
SLK2L3DH	196532	440N
SLK2L7DH	196534	440N
SLK15L5DH	196505	195N
SLK15L3DH	196504	195N
SLK2L5DH	196533	440N
SLK15L1DH	196676	195N


- Thickness (T):** 12.5 mm
- Width (W):** 19 mm
- Height (H):** 55 mm
- Angle (a):** 90 ° Max

YDERLIGERE PRODUKTOPLYSNINGER

Load rating is only applicable if the load-bearing capacity of the supporting element (steel decking) is adequate.

Check with deck manufacturer for recommended load capacity.

DIAGRAMS

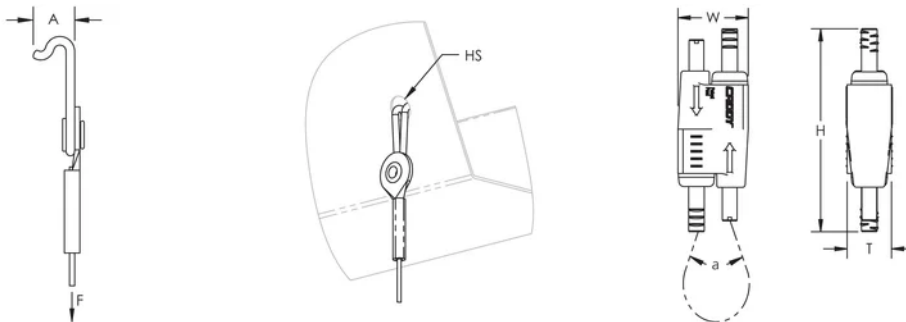

ADVARSEL

nVent-produkter skal kun installeres og anvendes som angivet i nVents produktvejledninger og træningsmaterialer. Vejledninger er tilgængelige på www.nvent.com og hos din nVent kundeservicerepræsentant. Forkert installation, misbrug, fejlanvendelse eller anden undladelse af fuldt ud at følge nVents instruktioner og advarsler kan medføre funktionsfejl, materielle skader, alvorlige personskader eller død og/eller ugyldiggøre din garanti.

North America

+1.800.753.9221

Option 1 – Customer Care

Option 2 – Technical

Support

Europe

Netherlands:

+31 800-0200135

France:

+33 800 901 793

Europe

Germany:

800 1890272

Other Countries:

+31 13 5835404

APAC

Shanghai:

+ 86 21 2412 1618/19

Sydney:

+61 2 9751 8500



Vores kraftfulde portefølje af mærker:

CADDY

ERICO

HOFFMAN

ILSCO

SCHROFF

TRACHTE

