


LENTON® LOCK Coupler Transition Charts

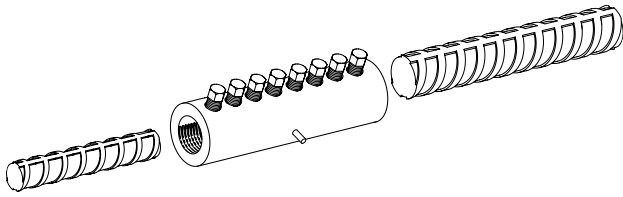

ASTM® Rebar

Standard LENTON LOCK is designed to be used for single-step transitions on ASTM bar and in a few cases multi-step transitions.

Rebar Size	LL12B1	LL16B1	LL20B1	LL22B1	LL25B1	LL28B1	LL32B1	LL36B1	LL43B1	LL57B1
	LL12S1	LL16S1	LL20S1	LL22S1	LL25S1	LL28S1	LL32S1	LL36S1	LL43S1	LL57S1
#3 (10 mm)	✓	—	—	—	—	—	—	—	—	—
#4 (12 mm)	✓	✓	—	—	—	—	—	—	—	—
#5 (16 mm)	—	✓	✓	—	—	—	—	—	—	—
#6 (20 mm)	—	—	✓	✓	✓	—	—	—	—	—
#7 (22 mm)	—	—	—	✓	✓	—	—	—	—	—
#8 (25 mm)	—	—	—	—	✓	✓	✓	—	—	—
#9 (28 mm)	—	—	—	—	—	✓	✓	—	—	—
#10 (32 mm)	—	—	—	—	—	—	✓	✓	—	—
#11 (36 mm)	—	—	—	—	—	—	—	✓	✓	—
#14 (43 mm)	—	—	—	—	—	—	—	—	✓	✓
#18 (57 mm)	—	—	—	—	—	—	—	—	—	✓

Canadian Rebar

Standard LENTON LOCK is designed to be used for single-step transitions on Canadian rebar.

Rebar Size	LL12B1	LL16B1	LL20B1	LL25B1	LL28B1	LL36B1	LL43B1	LL57B1
	LL12S1	LL16S1	LL20S1	LL25S1	LL28S1	LL36S1	LL43S1	LL57S1
10M	✓	✓	—	—	—	—	—	—
15M	—	✓	✓	—	—	—	—	—
20M	—	—	✓	✓	—	—	—	—
25M	—	—	—	✓	✓	—	—	—
30M	—	—	—	—	✓	✓	—	—
35M	—	—	—	—	—	✓	✓	—
45M	—	—	—	—	—	—	✓	✓
55M	—	—	—	—	—	—	—	✓

✓ Indicates which rebar sizes can be used in each coupler.

The higher-performing LENTON LOCK B-series coupler can be substituted in place of the LENTON LOCK S-series.

Please contact ERICO or visit www.erico.com for specific questions regarding regional availability, approvals or performance requirements.

ASTM is a registered trademark of the American Society for Testing and Materials.

WARNING
ERICO products shall be installed and used only as indicated in ERICO's product instruction sheets and training materials. Instruction sheets are available at www.erico.com and from your ERICO customer service representative. Improper installation, misuse, misapplication or other failure to completely follow ERICO's instructions and warnings may cause product malfunction, property damage, serious bodily injury and death.

Copyright ©2012 ERICO International Corporation. All rights reserved.
CADDY, CADWELD, CRITEC, ERICO, ERITECH, ERIFLEX, and LENTON are registered trademarks of ERICO International Corporation.

LENTON®

www.erico.com

ERICO®

C472LT12NAEN 0.225M1012